

Convolutional Neural Networks II

↳ fakticky je to trochu úsporná dense vrstva.

Milan Straka

📅 March 18, 2024



Charles University in Prague
Faculty of Mathematics and Physics
Institute of Formal and Applied Linguistics



unless otherwise stated

- Convolutions can provide
 - local interactions in spacial/temporal dimensions
 - shift invariance
 - *much* less parameters than a fully connected layer
- Usually repeated 3×3 convolutions are enough, no need for larger filter sizes.
- When pooling is performed, double the number of channels (i.e., the first convolution following the pooling layer will have twice as many output channels).
- If your network is deep enough (the last hidden neurons have a large receptive fields), final fully connected layers are not needed, and global average pooling is enough.
- Batch normalization is a great regularization method for CNNs, allowing removal/decrease of dropout and L^2 regularization.
- Small weight decay (i.e., L^2 regularization) of usually $1e-4$ is still useful for regularizing convolutional kernels.

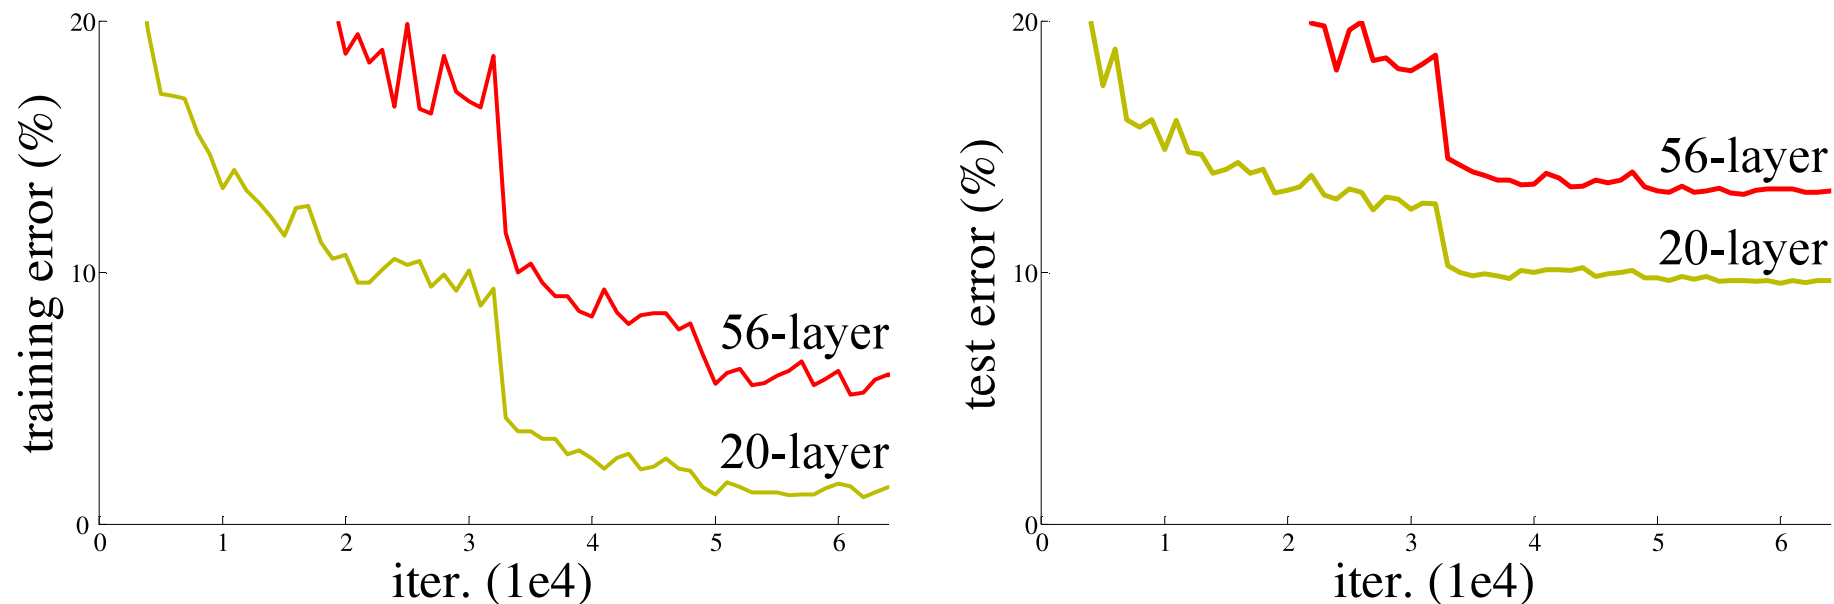


Figure 1. Training error (left) and test error (right) on CIFAR-10 with 20-layer and 56-layer “plain” networks. The deeper network has higher training error, and thus test error. Similar phenomena on ImageNet is presented in Fig. 4.

Figure 1 of "Deep Residual Learning for Image Recognition", <https://arxiv.org/abs/1512.03385>

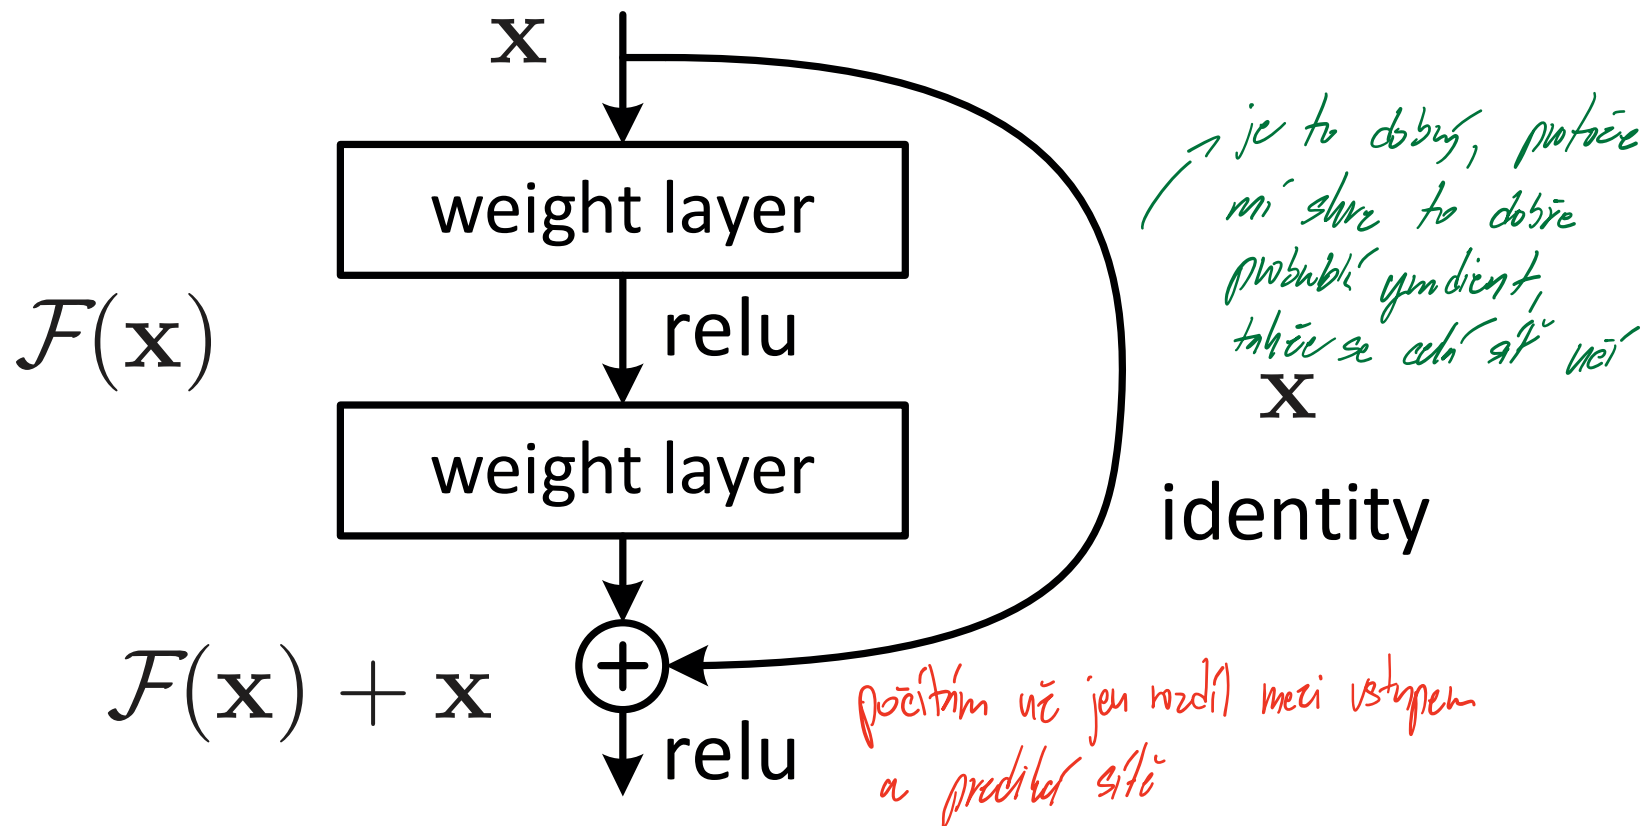


Figure 2. Residual learning: a building block.

Figure 2 of "Deep Residual Learning for Image Recognition", <https://arxiv.org/abs/1512.03385>

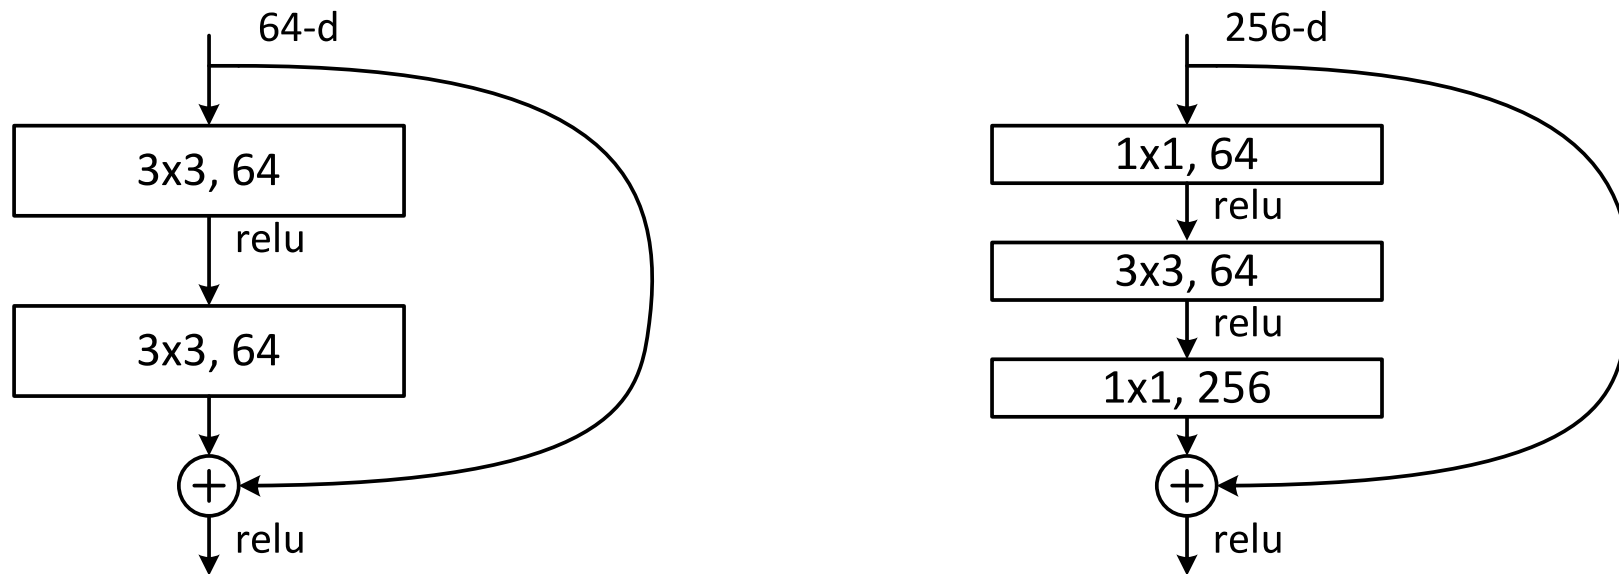



Figure 5. A deeper residual function $\mathcal{F}$ for ImageNet. Left: a building block (on 56×56 feature maps) as in Fig. 3 for ResNet-34. Right: a “bottleneck” building block for ResNet-50/101/152.

Figure 5 of "Deep Residual Learning for Image Recognition", <https://arxiv.org/abs/1512.03385>

layer name	output size	18-layer	34-layer	50-layer	101-layer	152-layer
conv1	112×112	7×7, 64, stride 2				
conv2_x	56×56	3×3 max pool, stride 2				
		$\begin{bmatrix} 3\times3, 64 \\ 3\times3, 64 \end{bmatrix} \times 2$	$\begin{bmatrix} 3\times3, 64 \\ 3\times3, 64 \end{bmatrix} \times 3$	$\begin{bmatrix} 1\times1, 64 \\ 3\times3, 64 \\ 1\times1, 256 \end{bmatrix} \times 3$	$\begin{bmatrix} 1\times1, 64 \\ 3\times3, 64 \\ 1\times1, 256 \end{bmatrix} \times 3$	$\begin{bmatrix} 1\times1, 64 \\ 3\times3, 64 \\ 1\times1, 256 \end{bmatrix} \times 3$
conv3_x	28×28	$\begin{bmatrix} 3\times3, 128 \\ 3\times3, 128 \end{bmatrix} \times 2$	$\begin{bmatrix} 3\times3, 128 \\ 3\times3, 128 \end{bmatrix} \times 4$	$\begin{bmatrix} 1\times1, 128 \\ 3\times3, 128 \\ 1\times1, 512 \end{bmatrix} \times 4$	$\begin{bmatrix} 1\times1, 128 \\ 3\times3, 128 \\ 1\times1, 512 \end{bmatrix} \times 4$	$\begin{bmatrix} 1\times1, 128 \\ 3\times3, 128 \\ 1\times1, 512 \end{bmatrix} \times 8$
conv4_x	14×14	$\begin{bmatrix} 3\times3, 256 \\ 3\times3, 256 \end{bmatrix} \times 2$	$\begin{bmatrix} 3\times3, 256 \\ 3\times3, 256 \end{bmatrix} \times 6$	$\begin{bmatrix} 1\times1, 256 \\ 3\times3, 256 \\ 1\times1, 1024 \end{bmatrix} \times 6$	$\begin{bmatrix} 1\times1, 256 \\ 3\times3, 256 \\ 1\times1, 1024 \end{bmatrix} \times 23$	$\begin{bmatrix} 1\times1, 256 \\ 3\times3, 256 \\ 1\times1, 1024 \end{bmatrix} \times 36$
conv5_x	7×7	$\begin{bmatrix} 3\times3, 512 \\ 3\times3, 512 \end{bmatrix} \times 2$	$\begin{bmatrix} 3\times3, 512 \\ 3\times3, 512 \end{bmatrix} \times 3$	$\begin{bmatrix} 1\times1, 512 \\ 3\times3, 512 \\ 1\times1, 2048 \end{bmatrix} \times 3$	$\begin{bmatrix} 1\times1, 512 \\ 3\times3, 512 \\ 1\times1, 2048 \end{bmatrix} \times 3$	$\begin{bmatrix} 1\times1, 512 \\ 3\times3, 512 \\ 1\times1, 2048 \end{bmatrix} \times 3$
	1×1	average pool, 1000-d fc, softmax				
FLOPs		1.8×10 ⁹	3.6×10 ⁹	3.8×10 ⁹	7.6×10 ⁹	11.3×10 ⁹

Table 1 of "Deep Residual Learning for Image Recognition", <https://arxiv.org/abs/1512.03385>

ResNet – 2015 (3.6% ILSVRC top-5 error)

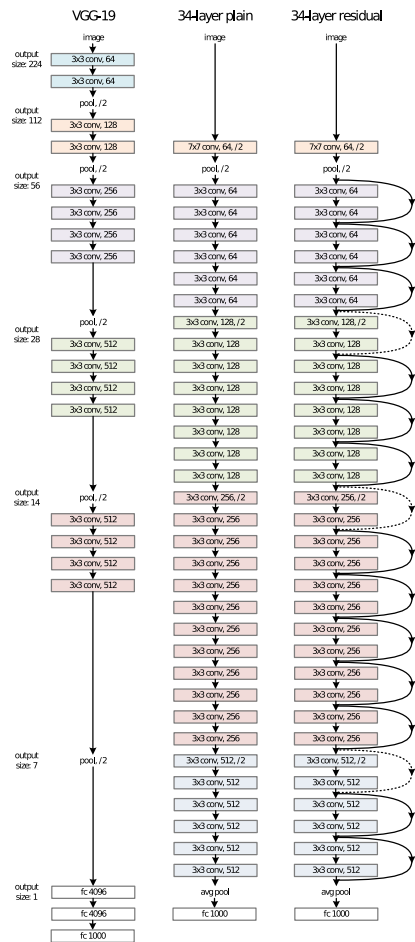

The residual connections cannot be applied directly when number of channels increases.

The authors considered several alternatives, and chose the one where in case of channels increase a 1×1 convolution + BN is used on the projections to match the required number of channels. The required spacial resolution is achieved by using stride 2.

Figure 3 of "Deep Residual Learning for Image Recognition", <https://arxiv.org/abs/1512.03385>

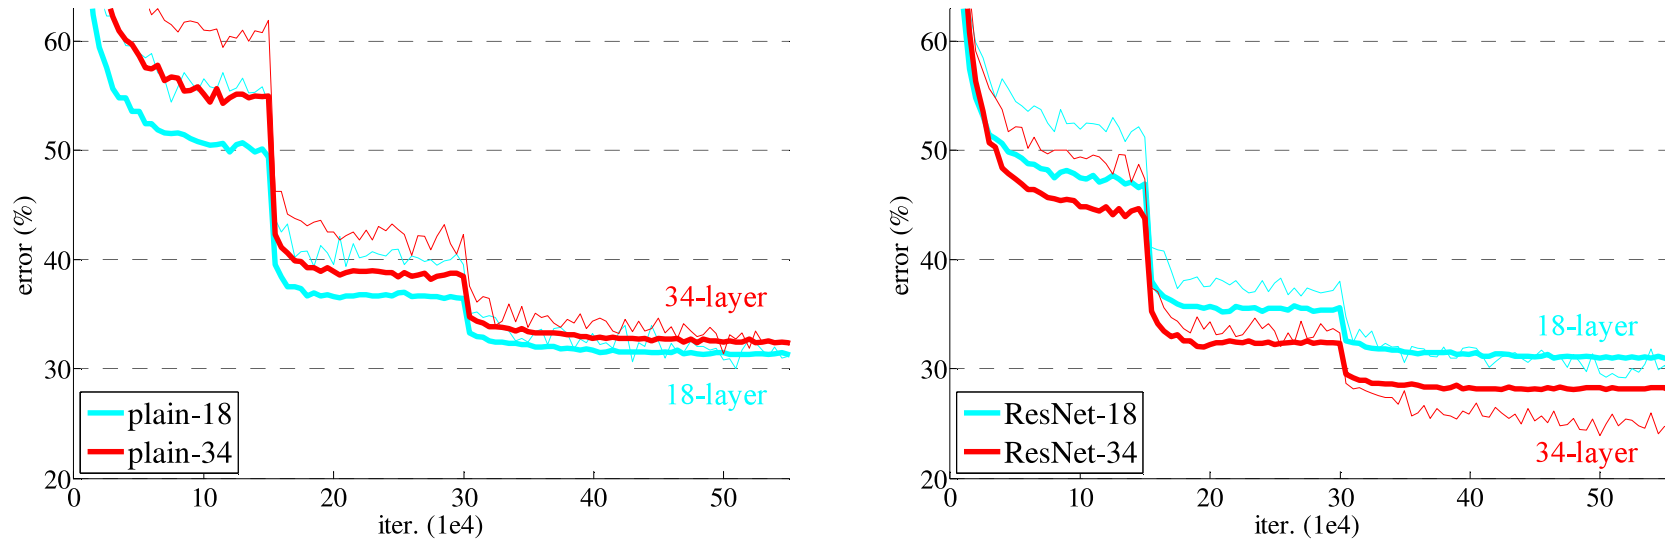


Figure 4. Training on **ImageNet**. Thin curves denote training error, and bold curves denote validation error of the center crops. Left: plain networks of 18 and 34 layers. Right: ResNets of 18 and 34 layers. In this plot, the residual networks have no extra parameter compared to their plain counterparts.

Figure 4 of "Deep Residual Learning for Image Recognition", <https://arxiv.org/abs/1512.03385>

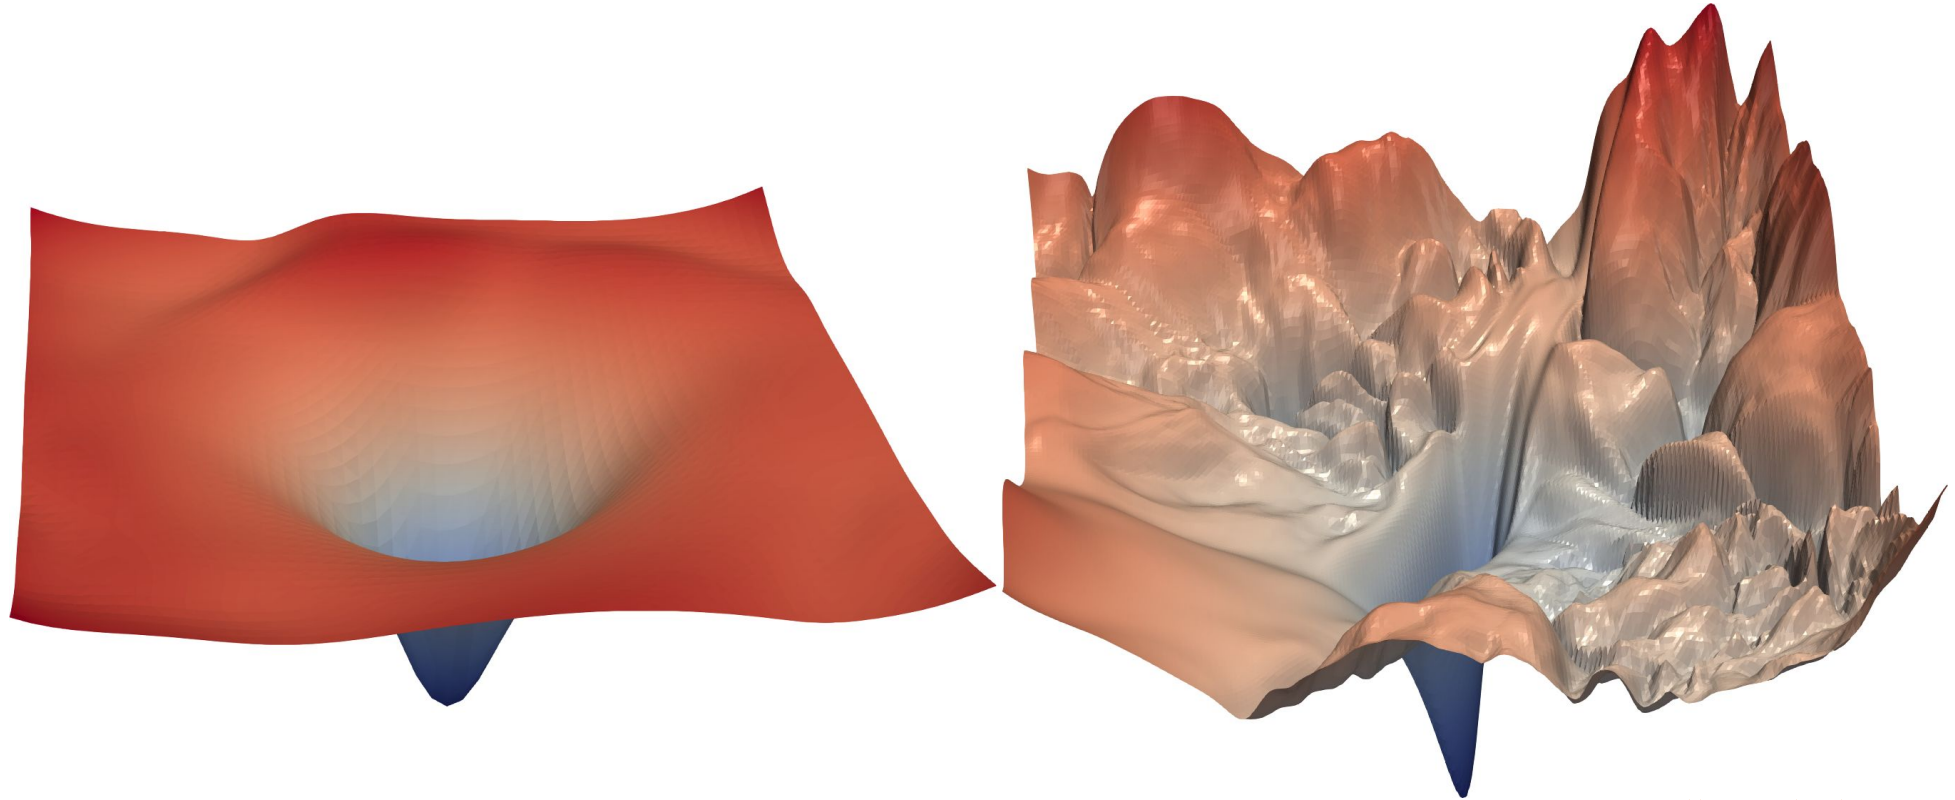


Figure 1 of "Visualizing the Loss Landscape of Neural Nets", <https://arxiv.org/abs/1712.09913>

Training details:

- batch normalizations after each convolution and before activation
- SGD with batch size 256 and momentum of 0.9
- learning rate starts with 0.1 and “is divided by 10 when the error plateaus”
 - 600k training iterations are used (120 epochs, each containing 1.281M images)
 - according to one graph (and to their later paper) they decay at 25% and 50% of the training, so after epochs 30 and 60
 - other concurrent papers also use exponential decay or 25%-50%-75%
- no dropout, weight decay 0.0001
- during training, an image is resized with its shorter side randomly sampled in the range $[256, 480]$, and a random 224×224 crop is used
- during testing, 10-crop evaluation strategy is used
 - for the best results, the scores across multiple scales are averaged – the images are resized so that their smaller size is in $\{224, 256, 384, 480, 640\}$

method	top-1 err.	top-5 err.
VGG [41] (ILSVRC'14)	-	8.43 [†]
GoogLeNet [44] (ILSVRC'14)	-	7.89
VGG [41] (v5)	24.4	7.1
PRReLU-net [13]	21.59	5.71
BN-inception [16]	21.99	5.81
ResNet-34 B	21.84	5.71
ResNet-34 C	21.53	5.60
ResNet-50	20.74	5.25
ResNet-101	19.87	4.60
ResNet-152	19.38	4.49

Table 4. Error rates (%) of **single-model** results on the ImageNet validation set (except [†] reported on the test set).

Table 4 of "Deep Residual Learning for Image Recognition", <https://arxiv.org/abs/1512.03385>

method	top-5 err. (test)
VGG [41] (ILSVRC'14)	7.32
GoogLeNet [44] (ILSVRC'14)	6.66
VGG [41] (v5)	6.8
PRReLU-net [13]	4.94
BN-inception [16]	4.82
ResNet (ILSVRC'15)	3.57

Table 5. Error rates (%) of **ensembles**. The top-5 error is on the test set of ImageNet and reported by the test server.

Table 5 of "Deep Residual Learning for Image Recognition", <https://arxiv.org/abs/1512.03385>

The ResNet-34 B uses the 1×1 convolution on residual connections with different number of input and output channels; ResNet-34 C uses this convolution on all residual connections. Variant B is used for ResNet-50/101/152.

ResNet Ablations – Shortcuts

The authors of ResNet published an ablation study several months after the original paper.

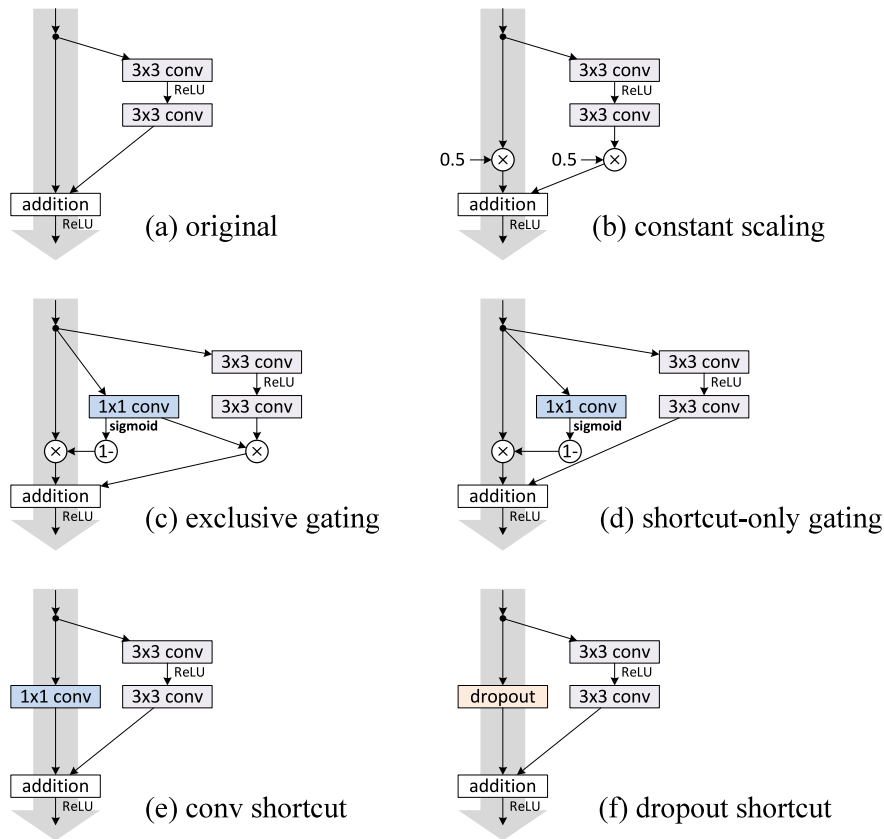



Table 1. Classification error on the CIFAR-10 test set using ResNet-110 [1], with different types of shortcut connections applied to all Residual Units. We report “fail” when the test error is higher than 20%.

case	Fig.	on shortcut	on $\mathcal{F}$	error (%)	remark
original [1]	Fig. 2(a)	1	1	6.61	
constant scaling	Fig. 2(b)	0	1	fail	This is a plain net
		0.5	1	fail	
		0.5	0.5	12.35	frozen gating
exclusive gating	Fig. 2(c)	$1 - g(\mathbf{x})$	$g(\mathbf{x})$	fail	init $b_g=0$ to -5
		$1 - g(\mathbf{x})$	$g(\mathbf{x})$	8.70	init $b_g=-6$
		$1 - g(\mathbf{x})$	$g(\mathbf{x})$	9.81	init $b_g=-7$
shortcut-only gating	Fig. 2(d)	$1 - g(\mathbf{x})$	1	12.86	init $b_g=0$
		$1 - g(\mathbf{x})$	1	6.91	init $b_g=-6$
1×1 conv shortcut	Fig. 2(e)	1×1 conv	1	12.22	
dropout shortcut	Fig. 2(f)	dropout 0.5	1	fail	

Table 1 of “Identity Mappings in Deep Residual Networks”, <https://arxiv.org/abs/1603.05027>

Figure 2 of “Identity Mappings in Deep Residual Networks”,
<https://arxiv.org/abs/1603.05027>

ResNet Ablations – Activations

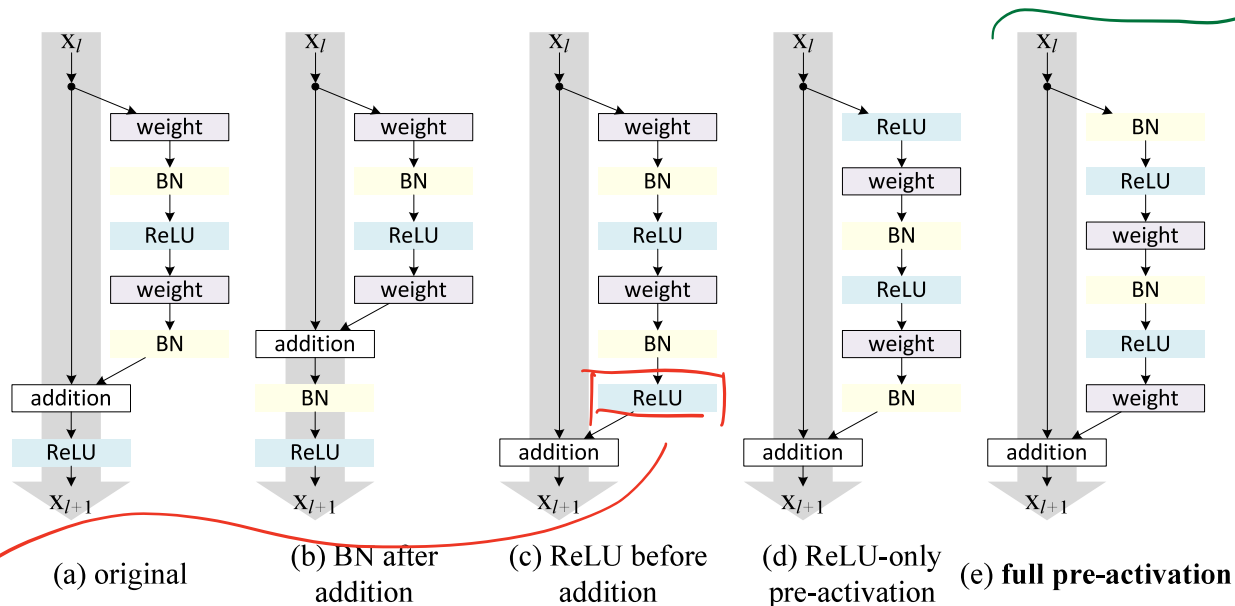

tabuľka funkcie najľahšie

batch-norm
po prídelení by
hodnoty máce
navonok.

diky tomu, ze ReLU
je jako posledniy bah
vtedy nemozem z toho
inputu odčítat.

Figure 4 of "Identity Mappings in Deep Residual Networks", <https://arxiv.org/abs/1603.05027>

Table 2. Classification error (%) on the CIFAR-10 test set using different activation functions.

case	Fig.	ResNet-110	ResNet-164
original Residual Unit [1]	Fig. 4(a)	6.61	5.93
BN after addition	Fig. 4(b)	8.17	6.50
ReLU before addition	Fig. 4(c)	7.84	6.14
ReLU-only pre-activation	Fig. 4(d)	6.71	5.91
full pre-activation	Fig. 4(e)	6.37	5.46

Table 2 of "Identity Mappings in Deep Residual Networks", <https://arxiv.org/abs/1603.05027>

The *pre-activation* architecture was evaluated also on ImageNet, in a single-crop regime.

Table 5. Comparisons of single-crop error on the ILSVRC 2012 validation set. All ResNets are trained using the same hyper-parameters and implementations as [1]). Our Residual Units are the full pre-activation version (Fig. 4(e)). [†]: code/model available at <https://github.com/facebook/fb.resnet.torch/tree/master/pretrained>, using scale and aspect ratio augmentation in [20].

method	augmentation	train crop	test crop	top-1	top-5
ResNet-152, original Residual Unit [1]	scale	224×224	224×224	23.0	6.7
ResNet-152, original Residual Unit [1]	scale	224×224	320×320	21.3	5.5
ResNet-152, pre-act Residual Unit	scale	224×224	320×320	21.1	5.5
ResNet-200, original Residual Unit [1]	scale	224×224	320×320	21.8	6.0
ResNet-200, pre-act Residual Unit	scale	224×224	320×320	20.7	5.3
ResNet-200, pre-act Residual Unit	scale+asp ratio	224×224	320×320	20.1[†]	4.8[†]
Inception v3 [19]	scale+asp ratio	299×299	299×299	21.2	5.6

Table 5 of "Identity Mappings in Deep Residual Networks", <https://arxiv.org/abs/1603.05027>

Hordeľy jsou vidět až u hodně hlubokých sítí...

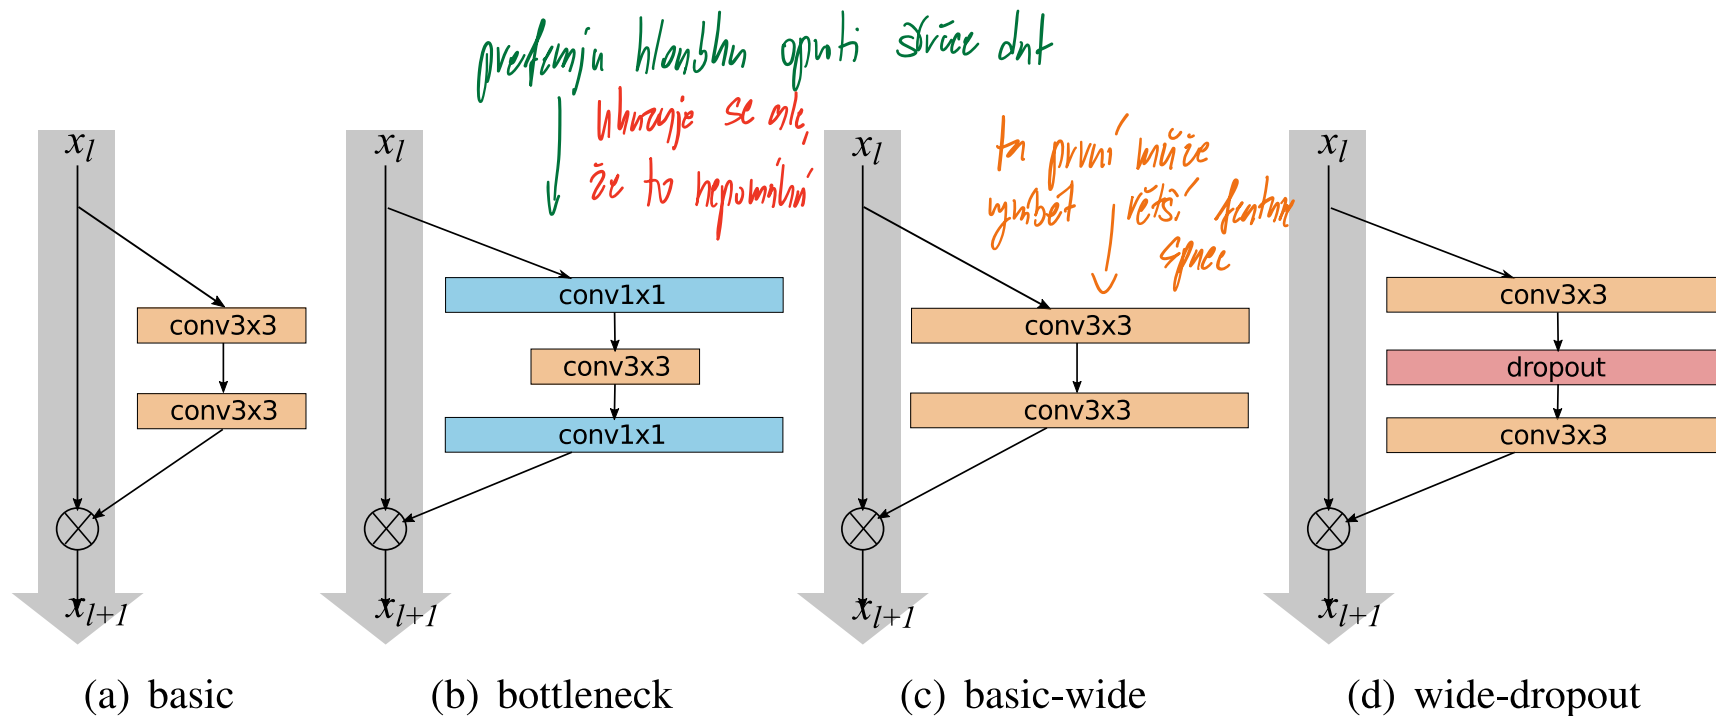


Figure 1: Various residual blocks used in the paper. Batch normalization and ReLU precede each convolution (omitted for clarity)

Figure 1 of "Wide Residual Networks", <https://arxiv.org/abs/1605.07146>

- Authors do not consider bottleneck blocks. Instead, they experiment with different *block types*, e.g., $B(1, 3, 1)$ or $B(3, 3)$.

block type	depth	# params	time,s	CIFAR-10
$B(1, 3, 1)$	40	1.4M	85.8	6.06
$B(3, 1)$	40	1.2M	67.5	5.78
$B(1, 3)$	40	1.3M	72.2	6.42
$B(3, 1, 1)$	40	1.3M	82.2	5.86
$B(3, 3)$	28	1.5M	67.5	5.73
$B(3, 1, 3)$	22	1.1M	59.9	5.78

Table 2 of "Wide Residual Networks", <https://arxiv.org/abs/1605.07146>

group name	output size	block type = $B(3, 3)$
conv1	32×32	$[3 \times 3, 16]$
conv2	32×32	$\begin{bmatrix} 3 \times 3, 16 \times k \\ 3 \times 3, 16 \times k \end{bmatrix} \times N$
conv3	16×16	$\begin{bmatrix} 3 \times 3, 32 \times k \\ 3 \times 3, 32 \times k \end{bmatrix} \times N$
conv4	8×8	$\begin{bmatrix} 3 \times 3, 64 \times k \\ 3 \times 3, 64 \times k \end{bmatrix} \times N$
avg-pool	1×1	$[8 \times 8]$

Table 1 of "Wide Residual Networks", <https://arxiv.org/abs/1605.07146>

→ také je základní blok na CIFAR 🏆

The $B(3, 3)$ is used in further experiments, unless specified otherwise.

udělat víc feature proudění, než došlo na vstup

- Authors evaluate various widening factors k

depth	k	# params	CIFAR-10	CIFAR-100
40	1	0.6M	6.85	30.89
40	2	2.2M	5.33	26.04
40	4	8.9M	4.97	22.89
40	8	35.7M	4.66	-
28	10	36.5M	4.17	20.50
28	12	52.5M	4.33	20.43
22	8	17.2M	4.38	21.22
22	10	26.8M	4.44	20.75
16	8	11.0M	4.81	22.07
16	10	17.1M	4.56	21.59

Table 4 of "Wide Residual Networks", <https://arxiv.org/abs/1605.07146>

↓
ani ní moc hluboký ani mělký
rozumní zvětšení pomůže

group name	output size	block type = $B(3, 3)$
conv1	32×32	$[3 \times 3, 16]$
conv2	32×32	$\begin{bmatrix} 3 \times 3, 16 \times k \\ 3 \times 3, 16 \times k \end{bmatrix} \times N$
conv3	16×16	$\begin{bmatrix} 3 \times 3, 32 \times k \\ 3 \times 3, 32 \times k \end{bmatrix} \times N$
conv4	8×8	$\begin{bmatrix} 3 \times 3, 64 \times k \\ 3 \times 3, 64 \times k \end{bmatrix} \times N$
avg-pool	1×1	$[8 \times 8]$

Table 1 of "Wide Residual Networks", <https://arxiv.org/abs/1605.07146>

- Authors measure the effect of *dropping out* inside the residual block (but not the residual connection itself)

depth	k	dropout	CIFAR-10	CIFAR-100	SVHN
16	4		5.02	24.03	1.85
16	4	✓	5.24	23.91	1.64
28	10		4.00	19.25	-
28	10	✓	3.89	18.85	-
52	1		6.43	29.89	2.08
52	1	✓	6.28	29.78	1.70

Table 6 of "Wide Residual Networks", <https://arxiv.org/abs/1605.07146>

group name	output size	block type = $B(3, 3)$
conv1	32×32	$[3 \times 3, 16]$
conv2	32×32	$\begin{bmatrix} 3 \times 3, 16 \times k \\ 3 \times 3, 16 \times k \end{bmatrix} \times N$
conv3	16×16	$\begin{bmatrix} 3 \times 3, 32 \times k \\ 3 \times 3, 32 \times k \end{bmatrix} \times N$
conv4	8×8	$\begin{bmatrix} 3 \times 3, 64 \times k \\ 3 \times 3, 64 \times k \end{bmatrix} \times N$
avg-pool	1×1	$[8 \times 8]$

Table 1 of "Wide Residual Networks", <https://arxiv.org/abs/1605.07146>

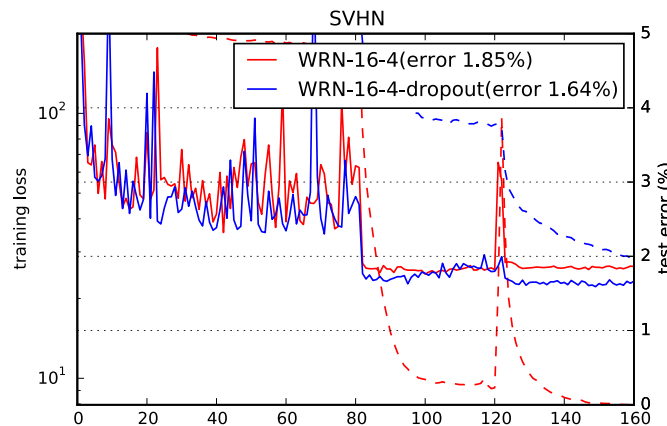
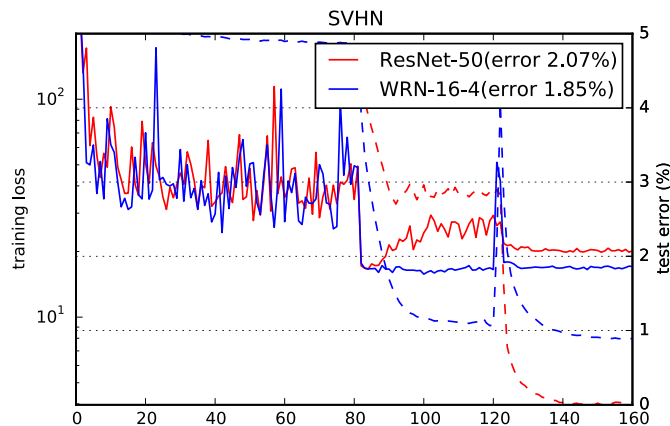


Figure 3 of "Wide Residual Networks", <https://arxiv.org/abs/1605.07146>

Dataset	Results				
CIFAR		depth- k	# params	CIFAR-10	CIFAR-100
	NIN [20]			8.81	35.67
	DSN [19]			8.22	34.57
	FitNet [24]			8.39	35.04
	Highway [28]			7.72	32.39
	ELU [5]			6.55	24.28
	original-ResNet[11]	110	1.7M	6.43	25.16
		1202	10.2M	7.93	27.82
	stoc-depth[14]	110	1.7M	5.23	24.58
		1202	10.2M	4.91	-
	pre-act-ResNet[13]	110	1.7M	6.37	-
		164	1.7M	5.46	24.33
		1001	10.2M	4.92(4.64)	22.71
WRN (ours)	40-4	8.9M	4.53	21.18	
	16-8	11.0M	4.27	20.43	
	28-10	36.5M	4.00	19.25	
Table 5 of "Wide Residual Networks", https://arxiv.org/abs/1605.07146					
ImageNet	Model	top-1 err, %	top-5 err, %	#params	time/batch 16
	ResNet-50	24.01	7.02	25.6M	49
	ResNet-101	22.44	6.21	44.5M	82
	ResNet-152	22.16	6.16	60.2M	115
	WRN-50-2-bottleneck	21.9	6.03	68.9M	93
	pre-ResNet-200	21.66	5.79	64.7M	154
Table 8 of "Wide Residual Networks", https://arxiv.org/abs/1605.07146					

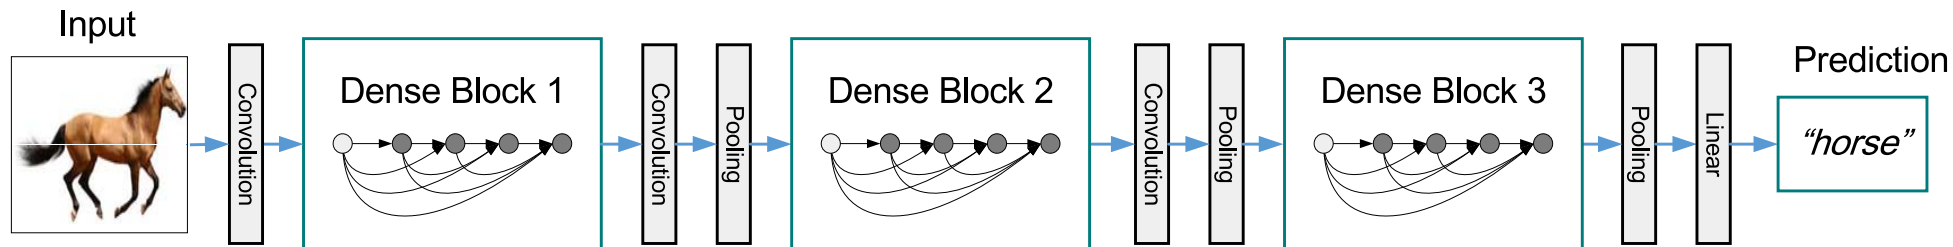


Figure 2 of "Densely Connected Convolutional Networks", <https://arxiv.org/abs/1608.06993>

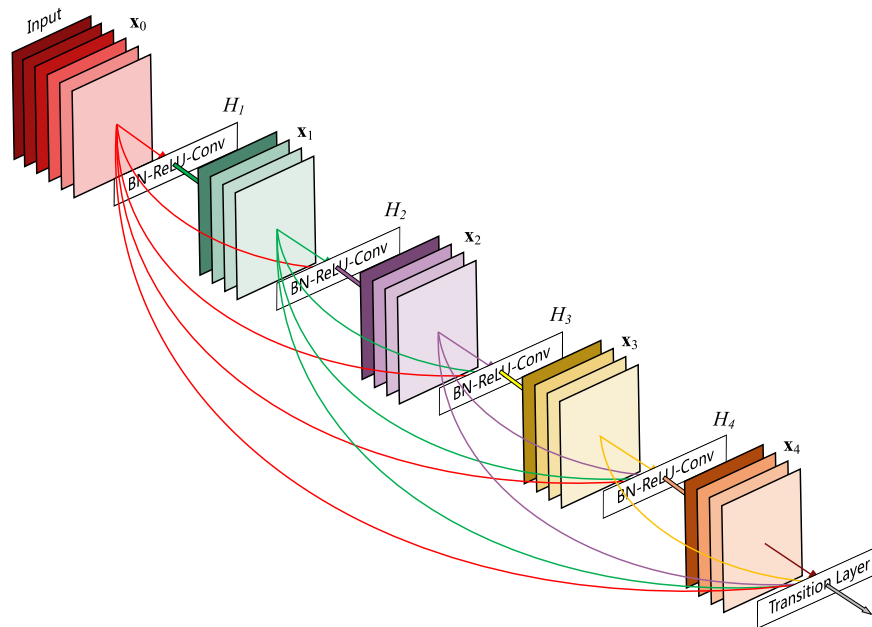


Figure 1 of "Densely Connected Convolutional Networks", <https://arxiv.org/abs/1608.06993>

DenseNet – Architecture

The initial convolution generates 64 channels, each 1×1 convolution in dense block 128, each 3×3 convolution in dense block 32, and the transition layer reduces the number of channels in the initial convolution by half.

Layers	Output Size	DenseNet-121	DenseNet-169	DenseNet-201	DenseNet-264
Convolution	112×112	7×7 conv, stride 2			
Pooling	56×56	3×3 max pool, stride 2			
Dense Block (1)	56×56	$\begin{bmatrix} 1 \times 1 \text{ conv} \\ 3 \times 3 \text{ conv} \end{bmatrix} \times 6$	$\begin{bmatrix} 1 \times 1 \text{ conv} \\ 3 \times 3 \text{ conv} \end{bmatrix} \times 6$	$\begin{bmatrix} 1 \times 1 \text{ conv} \\ 3 \times 3 \text{ conv} \end{bmatrix} \times 6$	$\begin{bmatrix} 1 \times 1 \text{ conv} \\ 3 \times 3 \text{ conv} \end{bmatrix} \times 6$
Transition Layer (1)	56×56	1×1 conv			
	28×28	2×2 average pool, stride 2			
Dense Block (2)	28×28	$\begin{bmatrix} 1 \times 1 \text{ conv} \\ 3 \times 3 \text{ conv} \end{bmatrix} \times 12$	$\begin{bmatrix} 1 \times 1 \text{ conv} \\ 3 \times 3 \text{ conv} \end{bmatrix} \times 12$	$\begin{bmatrix} 1 \times 1 \text{ conv} \\ 3 \times 3 \text{ conv} \end{bmatrix} \times 12$	$\begin{bmatrix} 1 \times 1 \text{ conv} \\ 3 \times 3 \text{ conv} \end{bmatrix} \times 12$
Transition Layer (2)	28×28	1×1 conv			
	14×14	2×2 average pool, stride 2			
Dense Block (3)	14×14	$\begin{bmatrix} 1 \times 1 \text{ conv} \\ 3 \times 3 \text{ conv} \end{bmatrix} \times 24$	$\begin{bmatrix} 1 \times 1 \text{ conv} \\ 3 \times 3 \text{ conv} \end{bmatrix} \times 32$	$\begin{bmatrix} 1 \times 1 \text{ conv} \\ 3 \times 3 \text{ conv} \end{bmatrix} \times 48$	$\begin{bmatrix} 1 \times 1 \text{ conv} \\ 3 \times 3 \text{ conv} \end{bmatrix} \times 64$
Transition Layer (3)	14×14	1×1 conv			
	7×7	2×2 average pool, stride 2			
Dense Block (4)	7×7	$\begin{bmatrix} 1 \times 1 \text{ conv} \\ 3 \times 3 \text{ conv} \end{bmatrix} \times 16$	$\begin{bmatrix} 1 \times 1 \text{ conv} \\ 3 \times 3 \text{ conv} \end{bmatrix} \times 32$	$\begin{bmatrix} 1 \times 1 \text{ conv} \\ 3 \times 3 \text{ conv} \end{bmatrix} \times 32$	$\begin{bmatrix} 1 \times 1 \text{ conv} \\ 3 \times 3 \text{ conv} \end{bmatrix} \times 48$
Classification Layer	1×1	7×7 global average pool			
		1000D fully-connected, softmax			

Table 1 of "Densely Connected Convolutional Networks", <https://arxiv.org/abs/1608.06993>

DenseNet – Results

Method	Depth	Params	C10	C10+	C100	C100+	SVHN
Network in Network [22]	-	-	10.41	8.81	35.68	-	2.35
All-CNN [32]	-	-	9.08	7.25	-	33.71	-
Deeply Supervised Net [20]	-	-	9.69	7.97	-	34.57	1.92
Highway Network [34]	-	-	-	7.72	-	32.39	-
FractalNet [17]	21	38.6M	10.18	5.22	35.34	23.30	2.01
with Dropout/Drop-path	21	38.6M	7.33	4.60	28.20	23.73	1.87
ResNet [11]	110	1.7M	-	6.61	-	-	-
ResNet (reported by [13])	110	1.7M	13.63	6.41	44.74	27.22	2.01
ResNet with Stochastic Depth [13]	110	1.7M	11.66	5.23	37.80	24.58	1.75
	1202	10.2M	-	4.91	-	-	-
Wide ResNet [42]	16	11.0M	-	4.81	-	22.07	-
	28	36.5M	-	4.17	-	20.50	-
with Dropout	16	2.7M	-	-	-	-	1.64
ResNet (pre-activation) [12]	164	1.7M	11.26*	5.46	35.58*	24.33	-
	1001	10.2M	10.56*	4.62	33.47*	22.71	-
DenseNet ($k = 12$)	40	1.0M	7.00	5.24	27.55	24.42	1.79
DenseNet ($k = 12$)	100	7.0M	5.77	4.10	23.79	20.20	1.67
DenseNet ($k = 24$)	100	27.2M	5.83	3.74	23.42	19.25	1.59
DenseNet-BC ($k = 12$)	100	0.8M	5.92	4.51	24.15	22.27	1.76
DenseNet-BC ($k = 24$)	250	15.3M	5.19	3.62	19.64	17.60	1.74
DenseNet-BC ($k = 40$)	190	25.6M	-	3.46	-	17.18	-

Table 2 of "Densely Connected Convolutional Networks", <https://arxiv.org/abs/1608.06993>




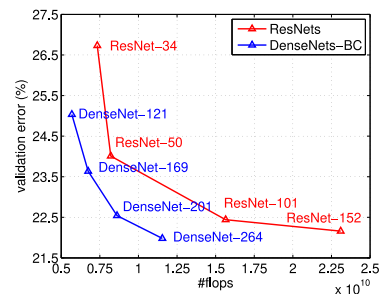



Figure 3 of "Densely Connected Convolutional Networks", <https://arxiv.org/abs/1608.06993>

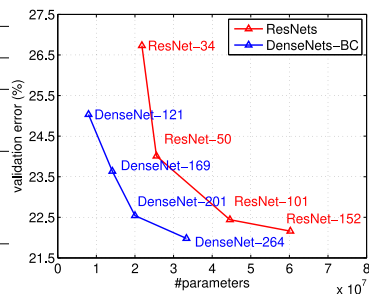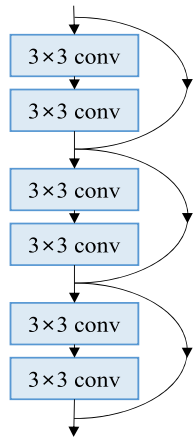


(a) basic

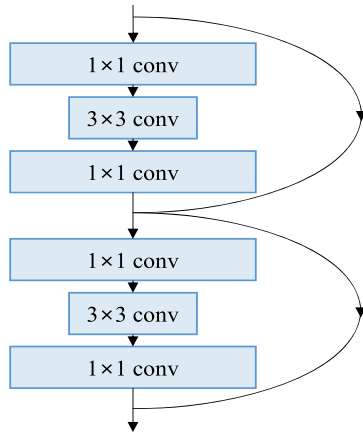


(b) bottleneck

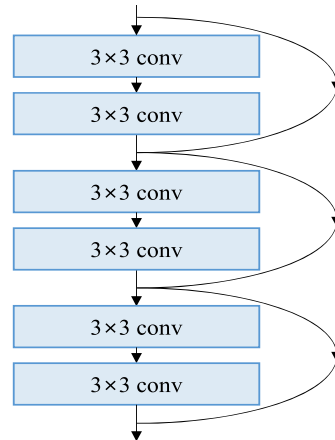

(c) wide

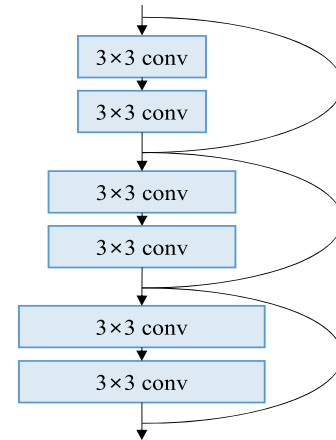

(d) pyramidal

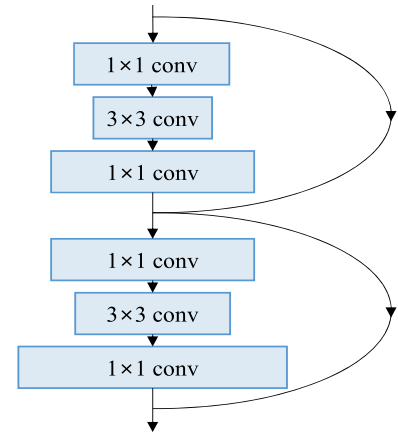

(e) pyramidal bottleneck

Figure 1 of "Deep Pyramidal Residual Networks", <https://arxiv.org/abs/1610.02915>

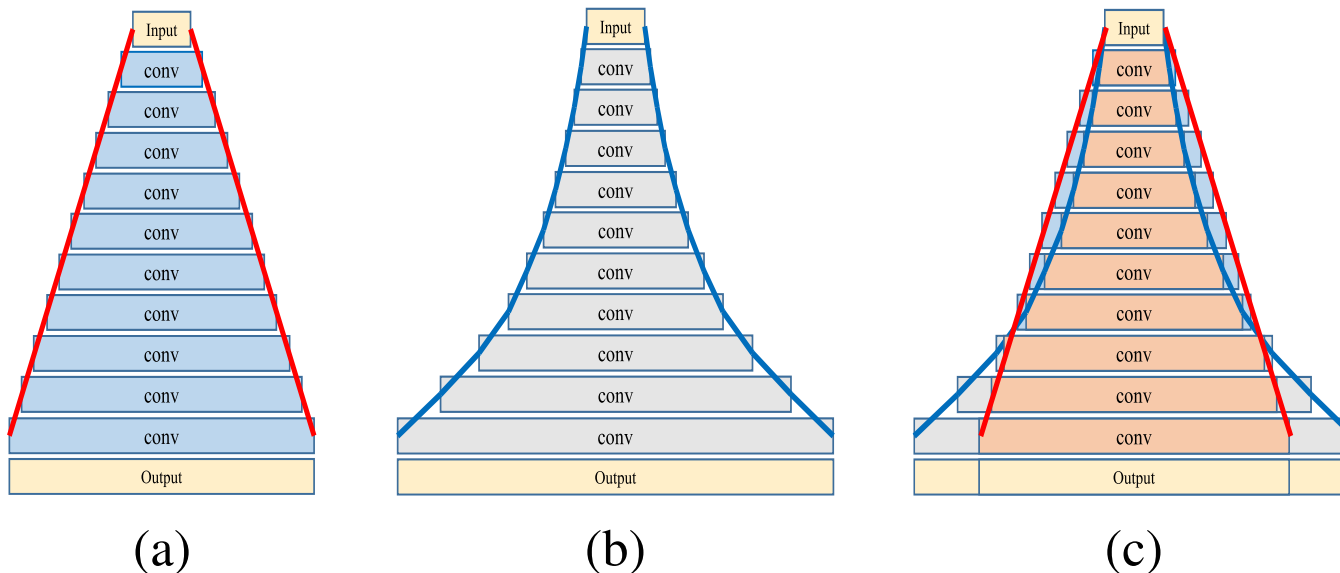


Figure 2 of "Deep Pyramidal Residual Networks", <https://arxiv.org/abs/1610.02915>


In architectures up until now, number of filters doubled when spacial resolution was halved.

Such exponential growth would suggest gradual widening rule $D_k = \lfloor D_{k-1} \cdot \alpha^{1/N} \rfloor$.


However, the authors employ a linear widening rule $D_k = \lfloor D_{k-1} + \alpha/N \rfloor$, where D_k is number of filters in the k -th out of N convolutional block and α is number of filters to add in total.

PyramidNet – Residual Connections

No residual connection can be a real identity – the authors propose to zero-pad missing channels, where the zero-pad channels correspond to newly computed features.

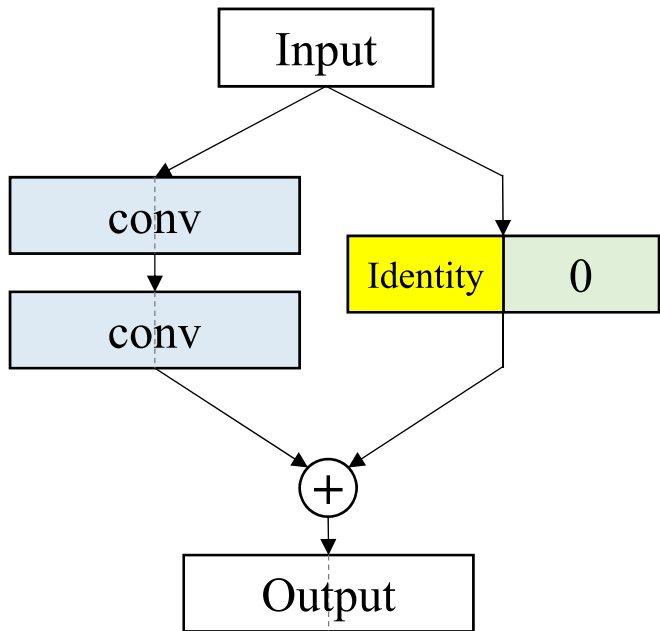

(a)

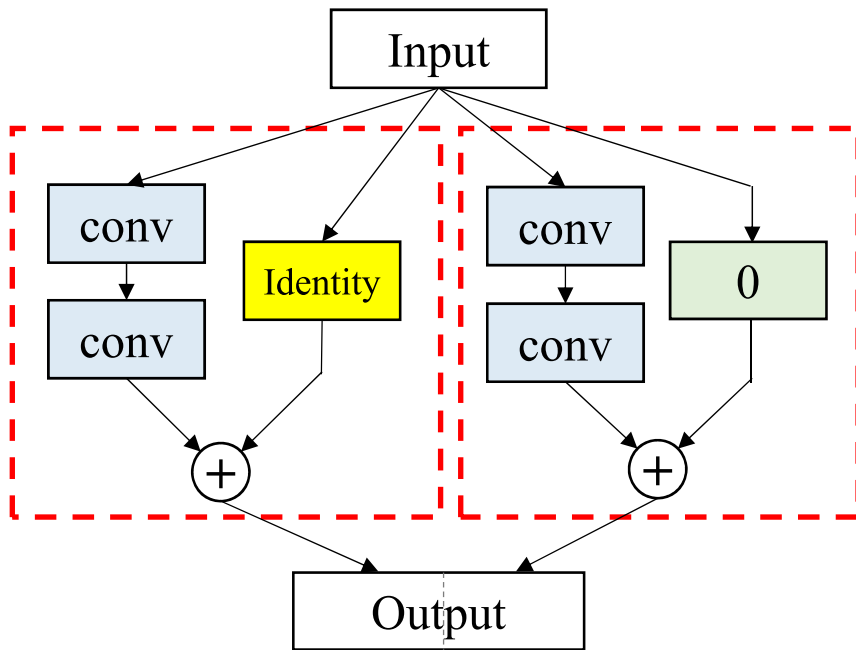

(b)

Figure 5 of "Deep Pyramidal Residual Networks", <https://arxiv.org/abs/1610.02915>

PyramidNet – CIFAR Results

Network	# of Params	Output Feat. Dim.	Depth	Training Mem.	CIFAR-10	CIFAR-100
NiN [18]	-	-	-	-	8.81	35.68
All-CNN [27]	-	-	-	-	7.25	33.71
DSN [17]	-	-	-	-	7.97	34.57
FitNet [21]	-	-	-	-	8.39	35.04
Highway [29]	-	-	-	-	7.72	32.39
Fractional Max-pooling [4]	-	-	-	-	4.50	27.62
ELU [29]	-	-	-	-	6.55	24.28
ResNet [7]	1.7M	64	110	547MB	6.43	25.16
ResNet [7]	10.2M	64	1001	2,921MB	-	27.82
ResNet [7]	19.4M	64	1202	2,069MB	7.93	-
Pre-activation ResNet [8]	1.7M	64	164	841MB	5.46	24.33
Pre-activation ResNet [8]	10.2M	64	1001	2,921MB	4.62	22.71
Stochastic Depth [10]	1.7M	64	110	547MB	5.23	24.58
Stochastic Depth [10]	10.2M	64	1202	2,069MB	4.91	-
FractalNet [14]	38.6M	1,024	21	-	4.60	23.73
SwapOut v2 (width×4) [26]	7.4M	256	32	-	4.76	22.72
Wide ResNet (width×4) [34]	8.7M	256	40	775MB	4.97	22.89
Wide ResNet (width×10) [34]	36.5M	640	28	1,383MB	4.17	20.50
Weighted ResNet [24]	19.1M	64	1192	-	5.10	-
DenseNet ($k = 24$) [9]	27.2M	2,352	100	4,381MB	3.74	19.25
DenseNet-BC ($k = 40$) [9]	25.6M	2,190	190	7,247MB	3.46	17.18
PyramidNet ($\alpha = 48$)	1.7M	64	110	655MB	4.58±0.06	23.12±0.04
PyramidNet ($\alpha = 84$)	3.8M	100	110	781MB	4.26±0.23	20.66±0.40
PyramidNet ($\alpha = 270$)	28.3M	286	110	1,437MB	3.73±0.04	18.25±0.10
PyramidNet (bottleneck, $\alpha = 270$)	27.0M	1,144	164	4,169MB	3.48±0.20	17.01±0.39
PyramidNet (bottleneck, $\alpha = 240$)	26.6M	1,024	200	4,451MB	3.44±0.11	16.51±0.13
PyramidNet (bottleneck, $\alpha = 220$)	26.8M	944	236	4,767MB	3.40±0.07	16.37±0.29
PyramidNet (bottleneck, $\alpha = 200$)	26.0M	864	272	5,005MB	3.31±0.08	16.35±0.24

Table 4 of "Deep Pyramidal Residual Networks", <https://arxiv.org/abs/1610.02915>

Group	Output size	Building Block	
conv 1	32×32	$[3 \times 3, 16]$	
conv 2	32×32	$3 \times 3, [16 + \alpha(k-1)/N]$	$\times N_2$
conv 3	16×16	$3 \times 3, [16 + \alpha(k-1)/N]$	$\times N_3$
conv 4	8×8	$3 \times 3, [16 + \alpha(k-1)/N]$	$\times N_4$
avg pool	1×1	$[8 \times 8, 16 + \alpha]$	

Table 1 of "Deep Pyramidal Residual Networks",
<https://arxiv.org/abs/1610.02915>

PyramidNet – ImageNet Results

Network	# of Params	Output Feat. Dim.	Augmentation	Train Crop	Test Crop	Top-1	Top-5
ResNet-152 [7]	60.0M	2,048	scale	224×224	224×224	23.0	6.7
Pre-ResNet-152 [†] [8]	60.0M	2,048	scale+asp ratio	224×224	224×224	22.2	6.2
Pre-ResNet-200 [†] [8]	64.5M	2,048	scale+asp ratio	224×224	224×224	21.7	5.8
WRN-50-2-bottleneck [34]	68.9M	2,048	scale+asp ratio	224×224	224×224	21.9	6.0
PyramidNet-200 ($\alpha = 300$)	62.1M	1,456	scale+asp ratio	224×224	224×224	20.5	5.3
PyramidNet-200 ($\alpha = 300$)*	62.1M	1,456	scale+asp ratio	224×224	224×224	20.5	5.4
PyramidNet-200 ($\alpha = 450$)*	116.4M	2,056	scale+asp ratio	224×224	224×224	20.1	5.4
ResNet-200 [7]	64.5M	2,048	scale	224×224	320×320	21.8	6.0
Pre-ResNet-200 [8]	64.5M	2,048	scale+asp ratio	224×224	320×320	20.1	4.8
Inception-v3 [32]	-	2,048	scale+asp ratio	299×299	299×299	21.2	5.6
Inception-ResNet-v1 [30]	-	1,792	scale+asp ratio	299×299	299×299	21.3	5.5
Inception-v4 [30]	-	1,536	scale+asp ratio	299×299	299×299	20.0	5.0
Inception-ResNet-v2 [30]	-	1,792	scale+asp ratio	299×299	299×299	19.9	4.9
PyramidNet-200 ($\alpha = 300$)	62.1M	1,456	scale+asp ratio	224×224	320×320	19.6	4.8
PyramidNet-200 ($\alpha = 300$)*	62.1M	1,456	scale+asp ratio	224×224	320×320	19.5	4.8
PyramidNet-200 ($\alpha = 450$)*	116.4M	2,056	scale+asp ratio	224×224	320×320	19.2	4.7

Table 5 of "Deep Pyramidal Residual Networks", <https://arxiv.org/abs/1610.02915>

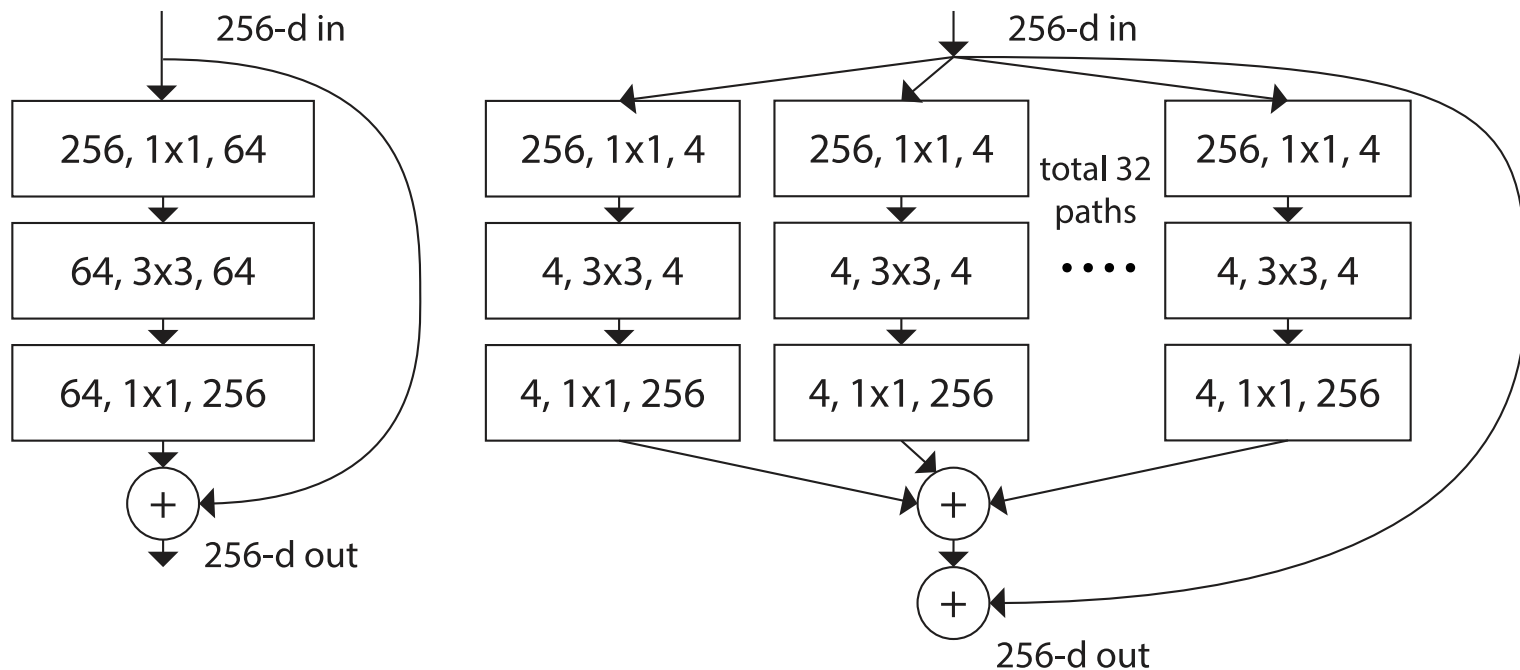


Figure 1. **Left:** A block of ResNet [14]. **Right:** A block of ResNeXt with cardinality = 32, with roughly the same complexity. A layer is shown as (# in channels, filter size, # out channels).

Figure 1 of "Aggregated Residual Transformations for Deep Neural Networks", <https://arxiv.org/abs/1611.05431>

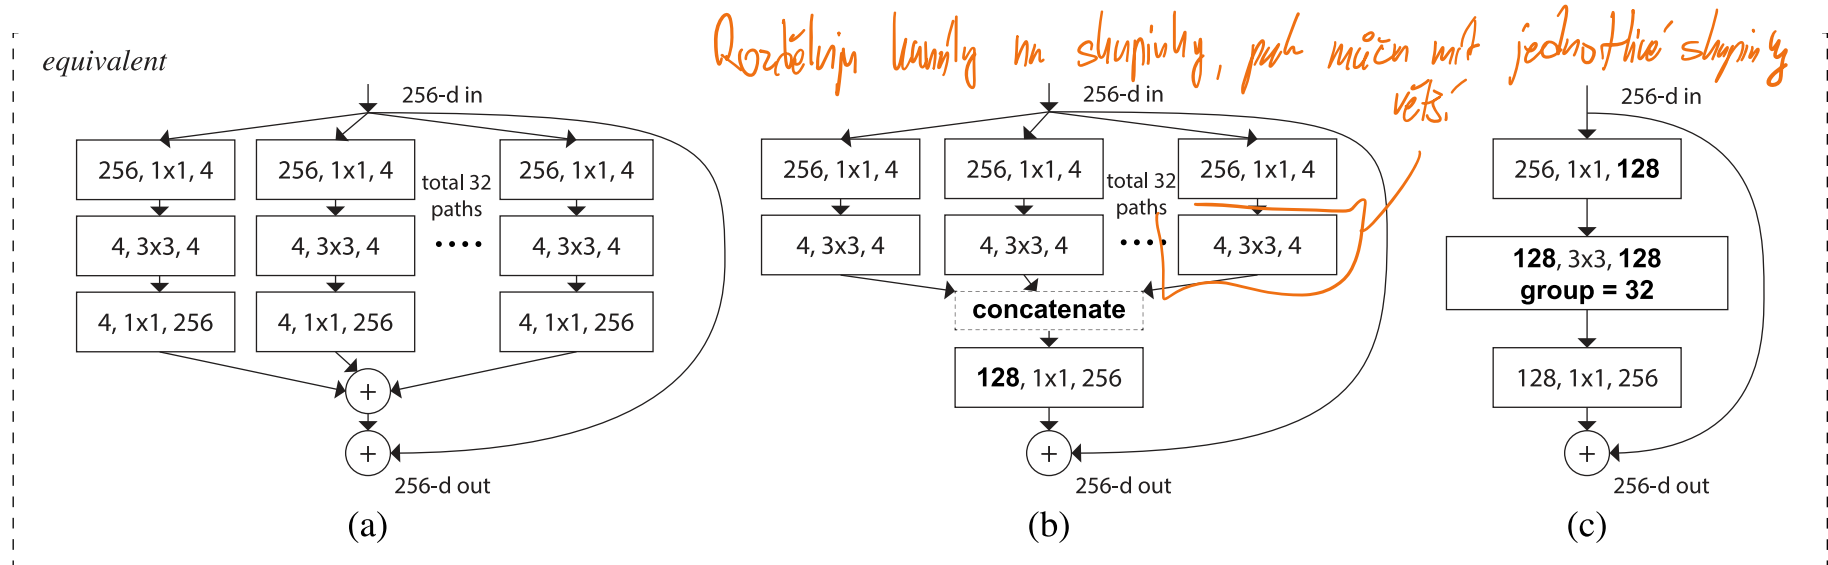


Figure 3. Equivalent building blocks of ResNeXt. **(a)**: Aggregated residual transformations, the same as Fig. 1 right. **(b)**: A block equivalent to (a), implemented as early concatenation. **(c)**: A block equivalent to (a,b), implemented as grouped convolutions [24]. Notations in **bold** text highlight the reformulation changes. A layer is denoted as (# input channels, filter size, # output channels).

Figure 3 of "Aggregated Residual Transformations for Deep Neural Networks", <https://arxiv.org/abs/1611.05431>

stage	output	ResNet-50	ResNeXt-50 ($32 \times 4d$)
conv1	112×112	7×7 , 64, stride 2	7×7 , 64, stride 2
conv2	56×56	3×3 max pool, stride 2	3×3 max pool, stride 2
		$\begin{bmatrix} 1 \times 1, 64 \\ 3 \times 3, 64 \\ 1 \times 1, 256 \end{bmatrix} \times 3$	$\begin{bmatrix} 1 \times 1, 128 \\ 3 \times 3, 128, C=32 \\ 1 \times 1, 256 \end{bmatrix} \times 3$
conv3	28×28	$\begin{bmatrix} 1 \times 1, 128 \\ 3 \times 3, 128 \\ 1 \times 1, 512 \end{bmatrix} \times 4$	$\begin{bmatrix} 1 \times 1, 256 \\ 3 \times 3, 256, C=32 \\ 1 \times 1, 512 \end{bmatrix} \times 4$
conv4	14×14	$\begin{bmatrix} 1 \times 1, 256 \\ 3 \times 3, 256 \\ 1 \times 1, 1024 \end{bmatrix} \times 6$	$\begin{bmatrix} 1 \times 1, 512 \\ 3 \times 3, 512, C=32 \\ 1 \times 1, 1024 \end{bmatrix} \times 6$
conv5	7×7	$\begin{bmatrix} 1 \times 1, 512 \\ 3 \times 3, 512 \\ 1 \times 1, 2048 \end{bmatrix} \times 3$	$\begin{bmatrix} 1 \times 1, 1024 \\ 3 \times 3, 1024, C=32 \\ 1 \times 1, 2048 \end{bmatrix} \times 3$
	1×1	global average pool 1000-d fc, softmax	global average pool 1000-d fc, softmax
# params.		25.5×10^6	25.0×10^6
FLOPs		4.1×10^9	4.2×10^9

32 skip in

Table 1 of "Aggregated Residual Transformations for Deep Neural Networks", <https://arxiv.org/abs/1611.05431>

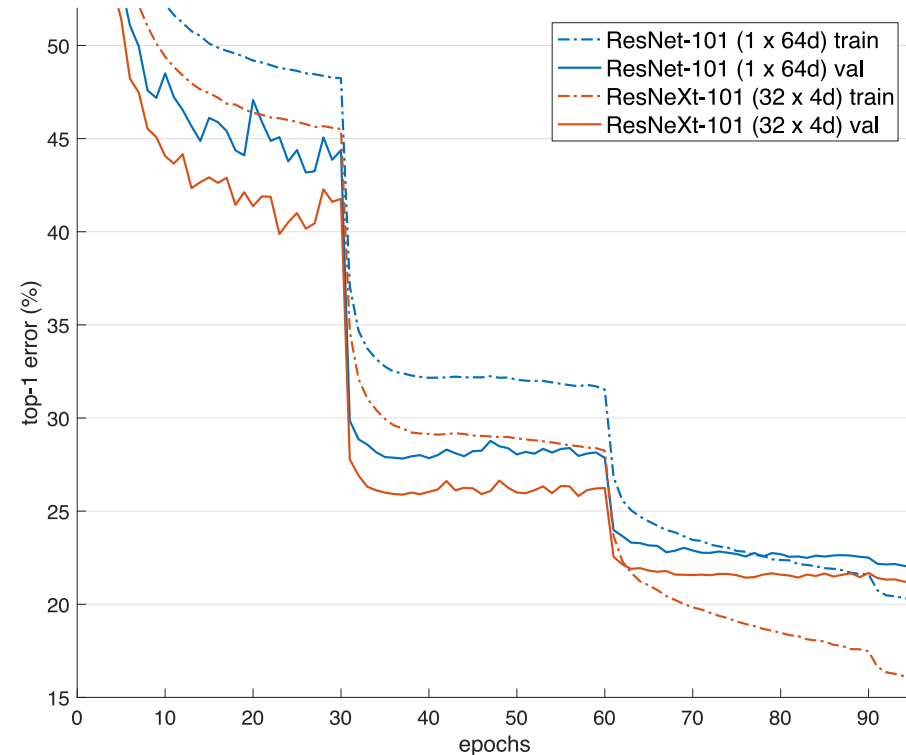
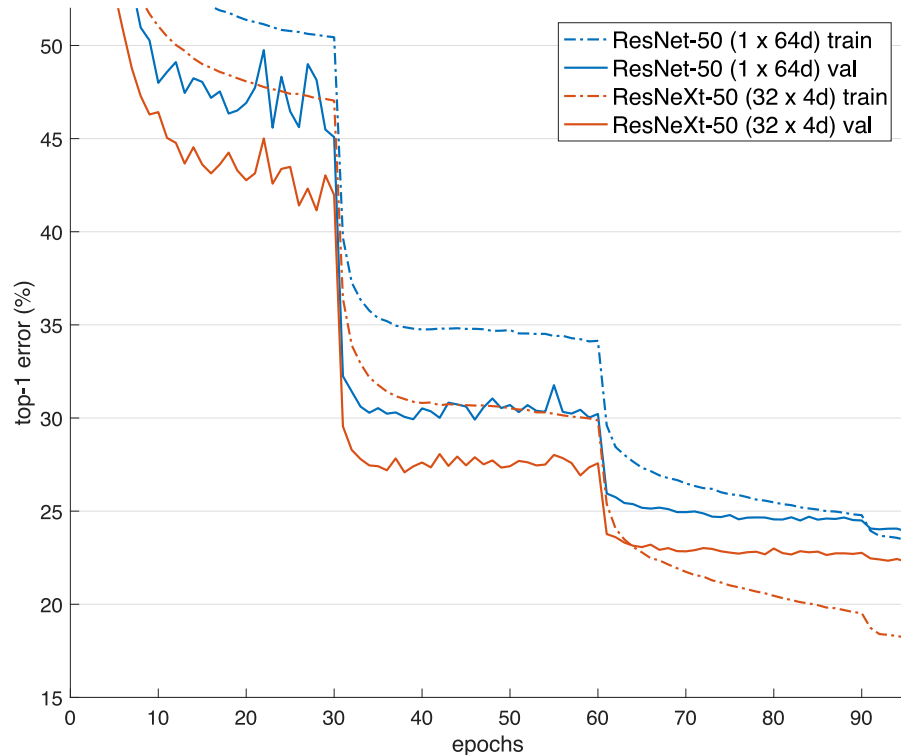


Figure 5. Training curves on ImageNet-1K. **(Left)**: ResNet/ResNeXt-50 with preserved complexity (~ 4.1 billion FLOPs, ~ 25 million parameters); **(Right)**: ResNet/ResNeXt-101 with preserved complexity (~ 7.8 billion FLOPs, ~ 44 million parameters).

Figure 5 of "Aggregated Residual Transformations for Deep Neural Networks", <https://arxiv.org/abs/1611.05431>

	setting	top-1 error (%)
ResNet-50	$1 \times 64d$	23.9
ResNeXt-50	$2 \times 40d$	23.0
ResNeXt-50	$4 \times 24d$	22.6
ResNeXt-50	$8 \times 14d$	22.3
ResNeXt-50	$32 \times 4d$	22.2
ResNet-101	$1 \times 64d$	22.0
ResNeXt-101	$2 \times 40d$	21.7
ResNeXt-101	$4 \times 24d$	21.4
ResNeXt-101	$8 \times 14d$	21.3
ResNeXt-101	$32 \times 4d$	21.2

Table 3 of "Aggregated Residual Transformations for Deep Neural Networks", <https://arxiv.org/abs/1611.05431>

Čím víc skupin, tím lepší

	setting	top-1 err (%)	top-5 err (%)
<i>1 × complexity references:</i>			
ResNet-101	$1 \times 64d$	22.0	6.0
ResNeXt-101	$32 \times 4d$	21.2	5.6
<i>2 × complexity models follow:</i>			
ResNet-200 [15]	$1 \times 64d$	21.7	5.8
ResNet-101, wider	$1 \times 100d$	21.3	5.7
ResNeXt-101	$2 \times 64d$	20.7	5.5
ResNeXt-101	$64 \times 4d$	20.4	5.3

Table 4 of "Aggregated Residual Transformations for Deep Neural Networks", <https://arxiv.org/abs/1611.05431>


Více skupin je zase lepší.

	224 × 224		320 × 320 / 299 × 299	
	top-1 err	top-5 err	top-1 err	top-5 err
ResNet-101 [14]	22.0	6.0	-	-
ResNet-200 [15]	21.7	5.8	20.1	4.8
Inception-v3 [39]	-	-	21.2	5.6
Inception-v4 [37]	-	-	20.0	5.0
Inception-ResNet-v2 [37]	-	-	19.9	4.9
ResNeXt-101 (64 × 4d)	20.4	5.3	19.1	4.4

Table 5 of "Aggregated Residual Transformations for Deep Neural Networks", <https://arxiv.org/abs/1611.05431>

Deep Networks with Stochastic Depth

Obečné nejdůležitější
feature není jedno
číslo velikosti, ale
správná lin. kom.
celého vektoru.

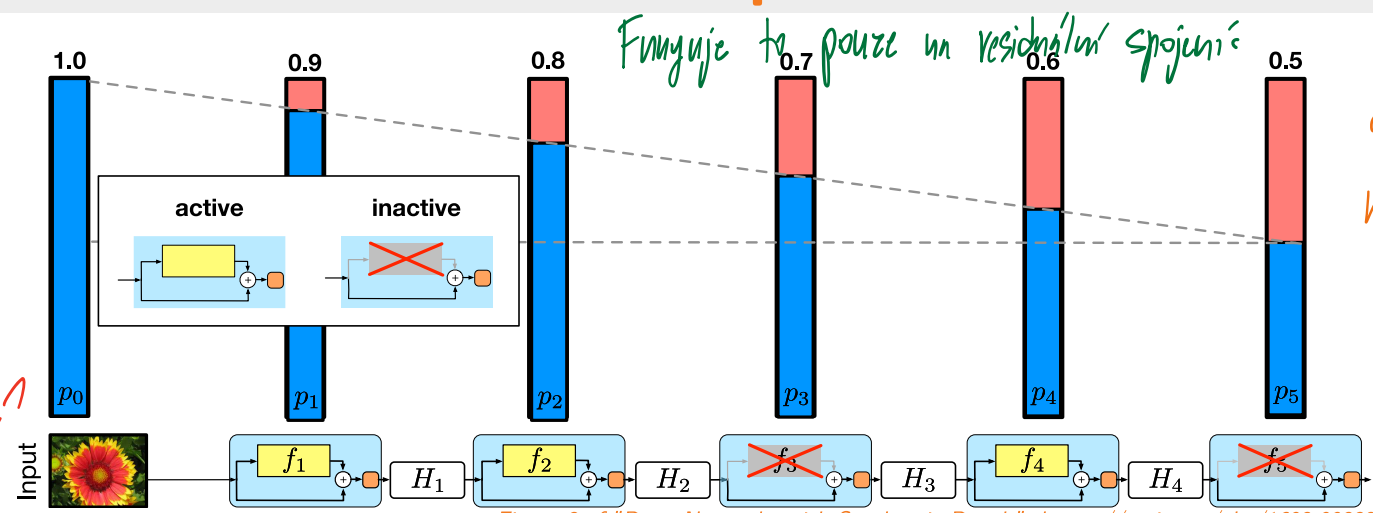


Funkuje to pouze na residuální spojení

dobře musíme mít
vzrušení hluboký
síť.

tohle nechej zahrnout, protože to drží local features.


We drop a whole block (but not the residual connection) with probability $1 - p_l$. During inference, we multiply the block output by p_l to compensate; or we can use the alternative approach like in regular dropout, where we divide the activation by p_l during training only.

All p_l can be set to a constant, but more effective approach is to utilize a simple linear decay $p_l = 1 - \frac{l}{L}(1 - p_L)$, where p_L is the final probability of the last layer, motivated by the intuition that the initial blocks extract low-level features utilized by the later layers, and should therefore be present.

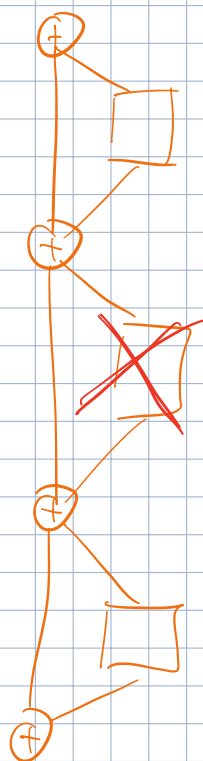

→ tedy díky residual connection
můžeme zachránit ten feature
space (potenciálně), takže
vyprázdnit jednu konvulci má
smysl, protože nás to stojí.

Na každé vrstvě
se úplně mění význam
jednotlivých feature,
takže vyhodit
jednu vrstvu znamená
to úplně změnit

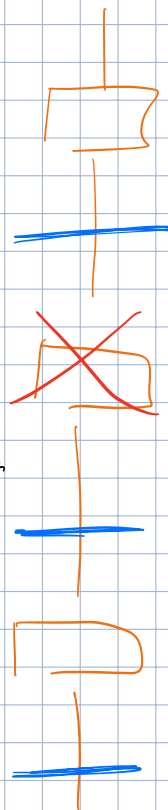

Deep Networks with Stochastic Depth

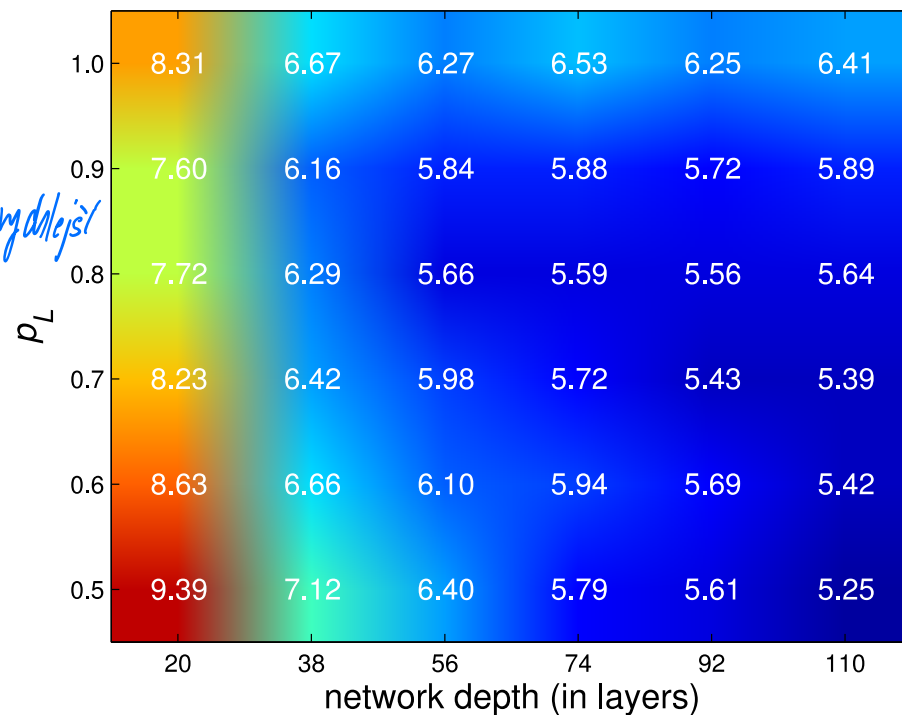
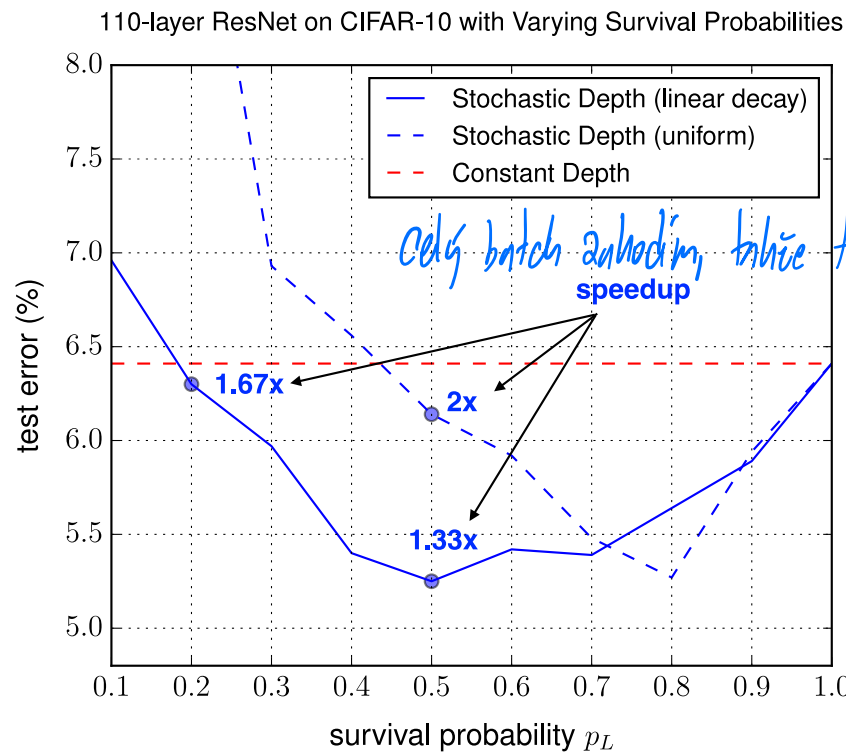


Figure 8 of "Deep Networks with Stochastic Depth", <https://arxiv.org/abs/1603.09382>

According to the ablation experiments, linear decay with $p_L = 0.5$ was selected.

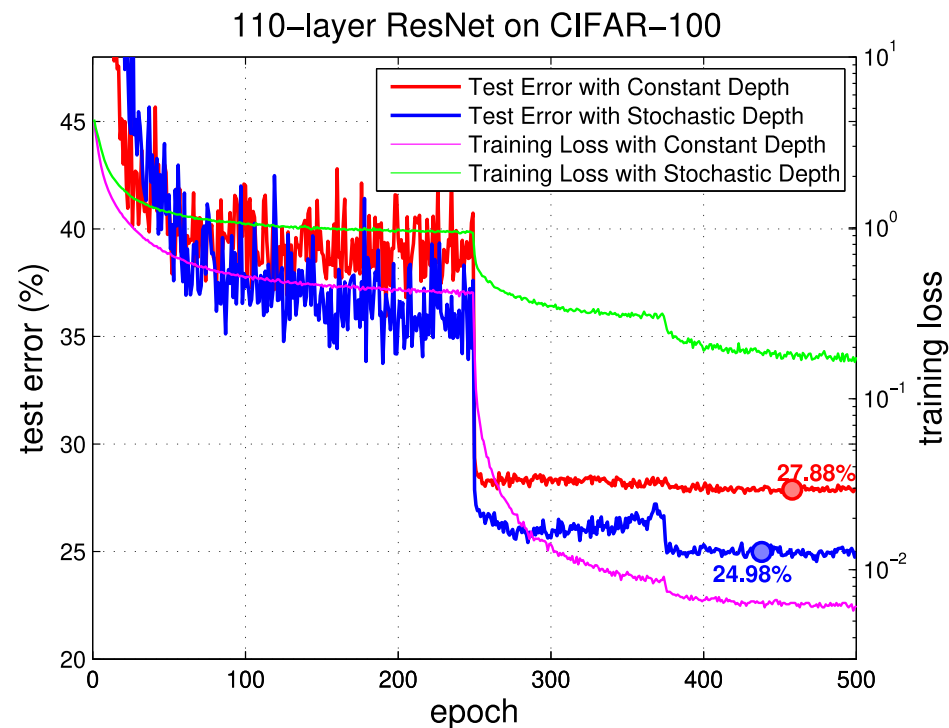
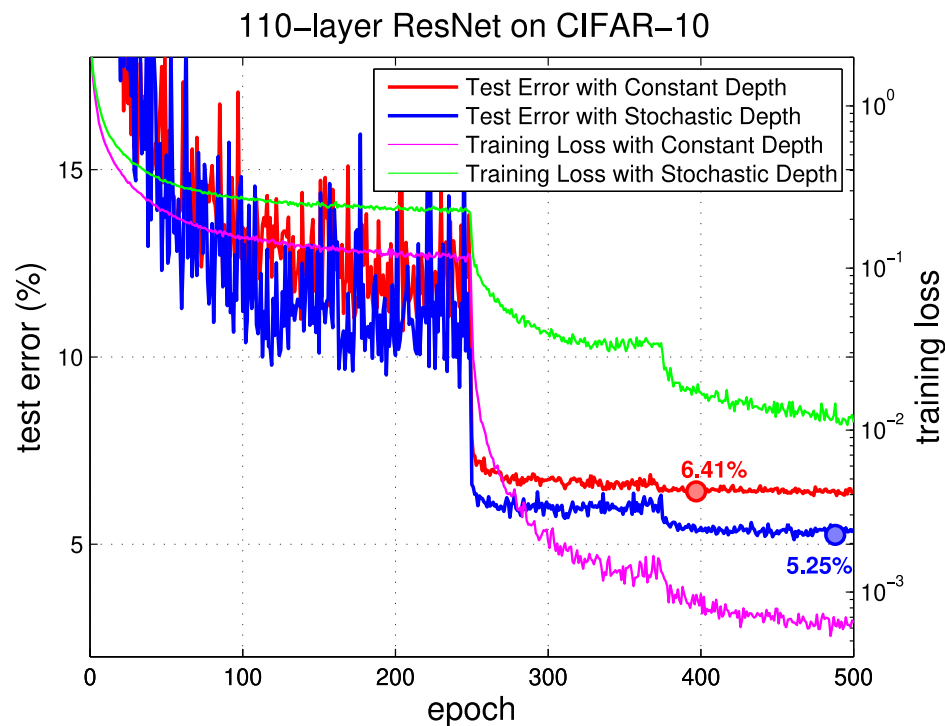
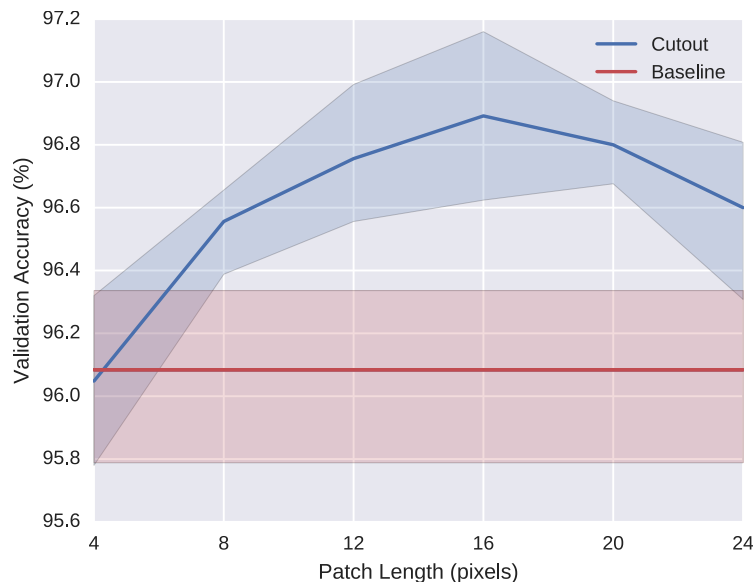


Figure 3 of "Deep Networks with Stochastic Depth", <https://arxiv.org/abs/1603.09382>

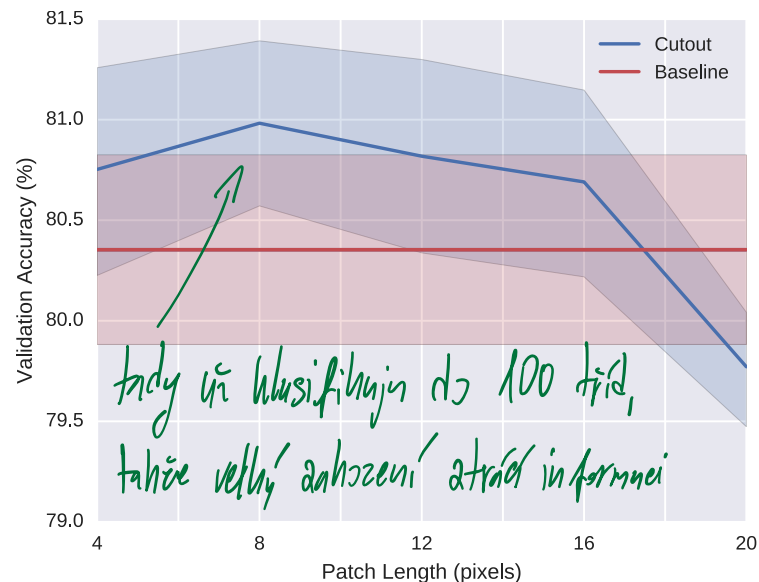


Figure 1 of "Improved Regularization of Convolutional Neural Networks with Cutout", <https://arxiv.org/abs/1708.04552>

Drop 16×16 square in the input image, with randomly chosen center. The pixels are replaced by their mean value from the dataset.



(a) CIFAR-10



(b) CIFAR-100

Figure 3 of "Improved Regularization of Convolutional Neural Networks with Cutout", <https://arxiv.org/abs/1708.04552>


Method	C10	C10+	C100	C100+	SVHN
ResNet18 [5]	10.63 ± 0.26	4.72 ± 0.21	36.68 ± 0.57	22.46 ± 0.31	-
ResNet18 + cutout	9.31 ± 0.18	3.99 ± 0.13	34.98 ± 0.29	21.96 ± 0.24	-
WideResNet [22]	6.97 ± 0.22	3.87 ± 0.08	26.06 ± 0.22	18.8 ± 0.08	1.60 ± 0.05
WideResNet + cutout	5.54 ± 0.08	3.08 ± 0.16	23.94 ± 0.15	18.41 ± 0.27	1.30 ± 0.03
Shake-shake regularization [4]	-	2.86	-	15.85	-
Shake-shake regularization + cutout	-	2.56 ± 0.07	-	15.20 ± 0.21	-

Table 1 of "Improved Regularization of Convolutional Neural Networks with Cutout", <https://arxiv.org/abs/1708.04552>


Dropout drops individual values, SpatialDropout drops whole channels, DropBlock drops rectangular areas in all channels at the same time.



(a)

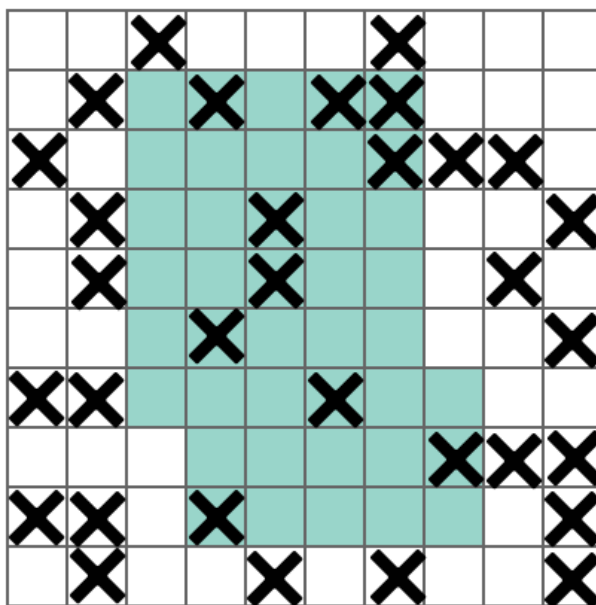

(b)

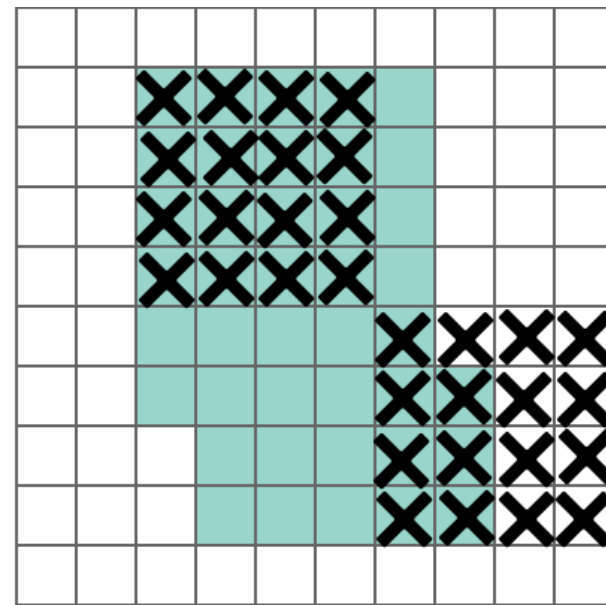

(c)

Figure 1 of "DropBlock: A regularization method for convolutional networks", <https://arxiv.org/abs/1810.12890>

The authors mention that they also tried applying DropBlock in every channel separately, but that masking all channels equally "tends to work better in our experiments".

Algorithm 1 DropBlock

- 1: **Input:** output activations of a layer (A), $block_size$, γ , $mode$
 - 2: **if** $mode == Inference$ **then**
 - 3: return A
 - 4: **end if**
 - 5: Randomly sample mask M : $M_{i,j} \sim Bernoulli(\gamma)$
 - 6: For each zero position $M_{i,j}$, create a spatial square mask with the center being $M_{i,j}$, the width, height being $block_size$ and set all the values of M in the square to be zero (see Figure 2).
 - 7: Apply the mask: $A = A \times M$
 - 8: Normalize the features: $A = A \times \text{count}(M) / \text{count_ones}(M)$
-

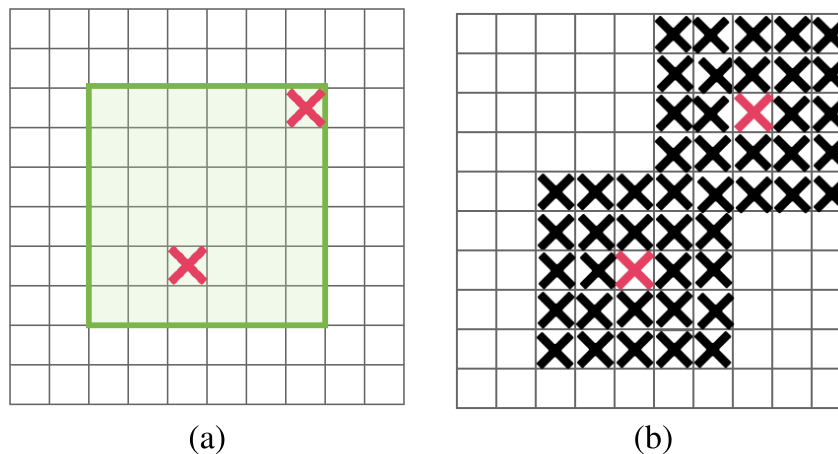


Figure 2 of "DropBlock: A regularization method for convolutional networks", <https://arxiv.org/abs/1810.12890>

DropBlock

The authors have chosen *block size*=7 and also employ linear schedule of the *keep probability*, which starts at 1 and linearly decays until the target value is reached at the end of training.

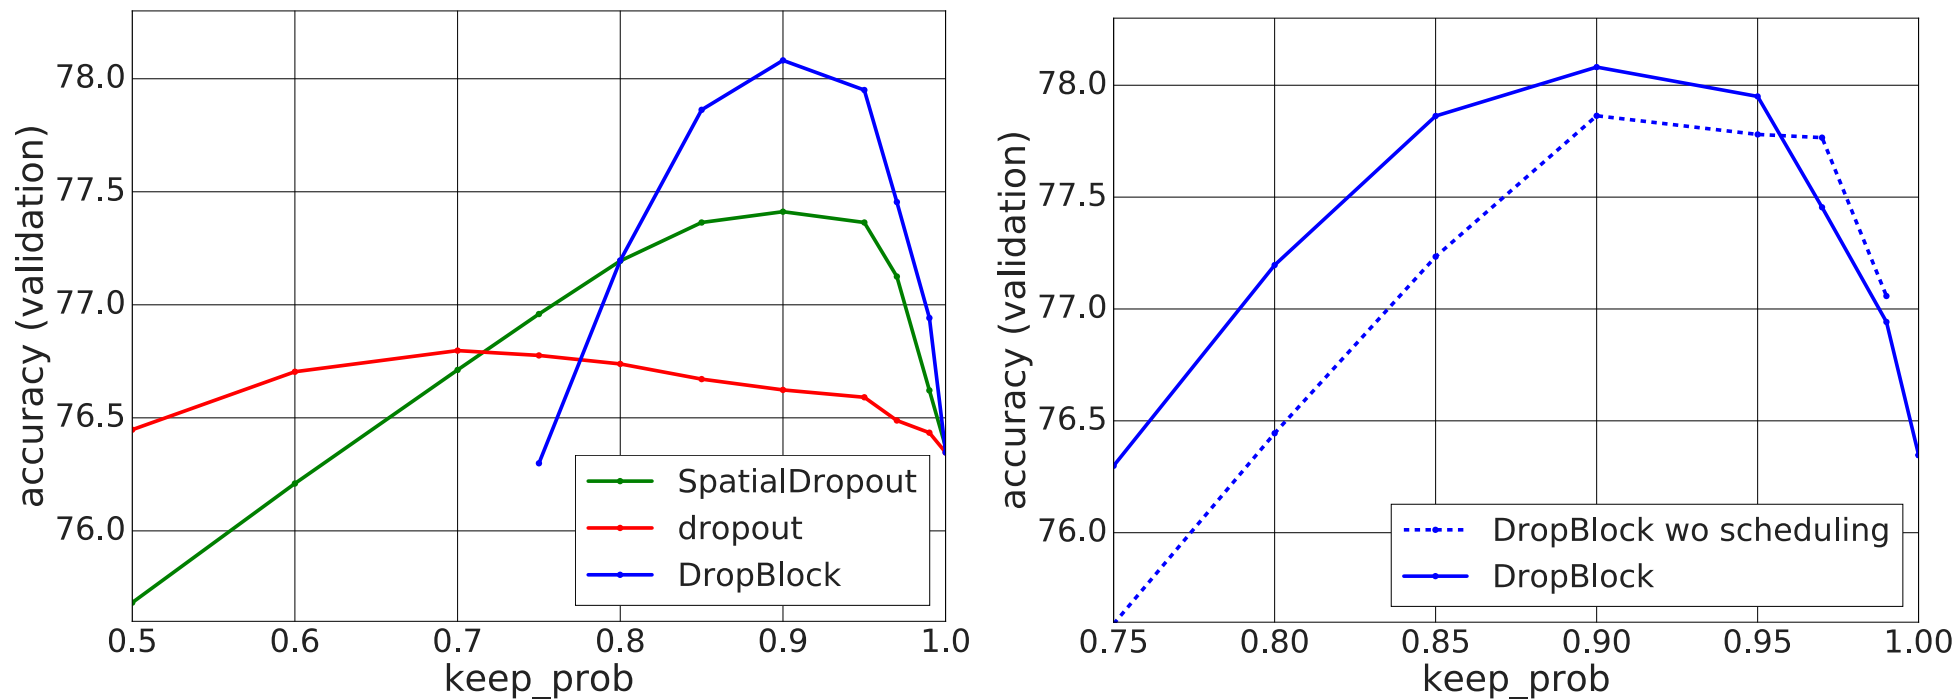


Figure 3 of "DropBlock: A regularization method for convolutional networks", <https://arxiv.org/abs/1810.12890>

Model	top-1(%)	top-5(%)
ResNet-50	76.51 ± 0.07	93.20 ± 0.05
ResNet-50 + dropout (kp=0.7) [1]	76.80 ± 0.04	93.41 ± 0.04
ResNet-50 + DropPath (kp=0.9) [17]	77.10 ± 0.08	93.50 ± 0.05
ResNet-50 + SpatialDropout (kp=0.9) [20]	77.41 ± 0.04	93.74 ± 0.02
ResNet-50 + Cutout [23]	76.52 ± 0.07	93.21 ± 0.04
ResNet-50 + AutoAugment [27]	77.63	93.82
ResNet-50 + label smoothing (0.1) [28]	77.17 ± 0.05	93.45 ± 0.03
ResNet-50 + DropBlock, (kp=0.9)	78.13 ± 0.05	94.02 ± 0.02
ResNet-50 + DropBlock (kp=0.9) + label smoothing (0.1)	78.35 ± 0.05	94.15 ± 0.03

Table 1 of "DropBlock: A regularization method for convolutional networks", <https://arxiv.org/abs/1810.12890>

The results are averages of three runs.

	ResNet-50	Mixup [48]	Cutout [3]	CutMix
Image				
Label	Dog 1.0	Dog 0.5 Cat 0.5	Dog 1.0	Dog 0.6 Cat 0.4
ImageNet Cls (%)	76.3 (+0.0)	77.4 (+1.1)	77.1 (+0.8)	78.6 (+2.3)
ImageNet Loc (%)	46.3 (+0.0)	45.8 (-0.5)	46.7 (+0.4)	47.3 (+1.0)
Pascal VOC Det (mAP)	75.6 (+0.0)	73.9 (-1.7)	75.1 (-0.5)	76.7 (+1.1)

Figure 1 of "CutMix: Regularization Strategy to Train Strong Classifiers with Localizable Features", <https://arxiv.org/abs/1905.04899>

To perform CutMix:

- First we sample λ uniformly from $(0, 1)$.
- We sample bounding box center uniformly.
- Width and height are set to $W\sqrt{\lambda}$, $H\sqrt{\lambda}$.
- Labels are combined as $\lambda y_A + (1 - \lambda)y_B$.

Model	# Params	Top-1 Err (%)	Top-5 Err (%)
ResNet-152*	60.3 M	21.69	5.94
ResNet-101 + SE Layer* [15]	49.4 M	20.94	5.50
ResNet-101 + GE Layer* [14]	58.4 M	20.74	5.29
ResNet-50 + SE Layer* [15]	28.1 M	22.12	5.99
ResNet-50 + GE Layer* [14]	33.7 M	21.88	5.80
ResNet-50 (Baseline)	25.6 M	23.68	7.05
ResNet-50 + Cutout [3]	25.6 M	22.93	6.66
ResNet-50 + StochDepth [17]	25.6 M	22.46	6.27
ResNet-50 + Mixup [48]	25.6 M	22.58	6.40
ResNet-50 + Manifold Mixup [42]	25.6 M	22.50	6.21
ResNet-50 + DropBlock* [8]	25.6 M	21.87	5.98
ResNet-50 + Feature CutMix	25.6 M	21.80	6.06
ResNet-50 + CutMix	25.6 M	21.40	5.92

Table 3 of "CutMix: Regularization Strategy to Train Strong Classifiers with Localizable Features", <https://arxiv.org/abs/1905.04899>

Model	# Params	Top-1 Err (%)	Top-5 Err (%)
ResNet-101 (Baseline) [12]	44.6 M	21.87	6.29
ResNet-101 + Cutout [3]	44.6 M	20.72	5.51
ResNet-101 + Mixup [48]	44.6 M	20.52	5.28
ResNet-101 + CutMix	44.6 M	20.17	5.24
ResNeXt-101 (Baseline) [45]	44.1 M	21.18	5.57
ResNeXt-101 + CutMix	44.1 M	19.47	5.03

Table 4 of "CutMix: Regularization Strategy to Train Strong Classifiers with Localizable Features", <https://arxiv.org/abs/1905.04899>

PyramidNet-200 ($\tilde{\alpha}=240$) (# params: 26.8 M)	Top-1 Err (%)	Top-5 Err (%)
Baseline	16.45	3.69
+ StochDepth [17]	15.86	3.33
+ Label smoothing ($\epsilon=0.1$) [38]	16.73	3.37
+ Cutout [3]	16.53	3.65
+ Cutout + Label smoothing ($\epsilon=0.1$)	15.61	3.88
+ DropBlock [8]	15.73	3.26
+ DropBlock + Label smoothing ($\epsilon=0.1$)	15.16	3.86
+ Mixup ($\alpha=0.5$) [48]	15.78	4.04
+ Mixup ($\alpha=1.0$) [48]	15.63	3.99
+ Manifold Mixup ($\alpha=1.0$) [42]	16.14	4.07
+ Cutout + Mixup ($\alpha=1.0$)	15.46	3.42
+ Cutout + Manifold Mixup ($\alpha=1.0$)	15.09	3.35
+ ShakeDrop [46]	15.08	2.72
+ CutMix	14.47	2.97
+ CutMix + ShakeDrop [46]	13.81	2.29

Table 5: Comparison of state-of-the-art regularization methods on CIFAR-100.

Table 5 of "CutMix: Regularization Strategy to Train Strong Classifiers with Localizable Features", <https://arxiv.org/abs/1905.04899>

PyramidNet-200 ($\tilde{\alpha}=240$)	Top-1 Error (%)
Baseline	3.85
+ Cutout	3.10
+ Mixup ($\alpha=1.0$)	3.09
+ Manifold Mixup ($\alpha=1.0$)	3.15
+ CutMix	2.88

Table 7: Impact of CutMix on CIFAR-10.

Table 7 of "CutMix: Regularization Strategy to Train Strong Classifiers with Localizable Features", <https://arxiv.org/abs/1905.04899>

In the following, $\lambda \sim \text{Beta}(\alpha, \alpha)$.

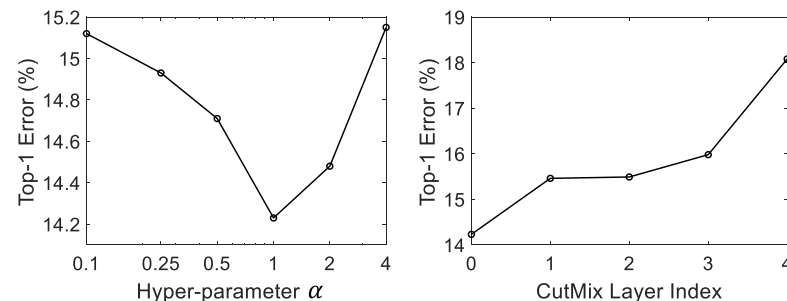


Figure 3: Impact of α and CutMix layer depth on CIFAR-100 top-1 error.

Figure 3 of "CutMix: Regularization Strategy to Train Strong Classifiers with Localizable Features", <https://arxiv.org/abs/1905.04899>

Squeeze and Excitation

The ILSVRC 2017 winner was SENet, *Squeeze and Excitation Network*, augmenting existing architectures by a **squeeze and excitation** block, which learns to emphasise informative channels and suppress less useful ones according to global information.

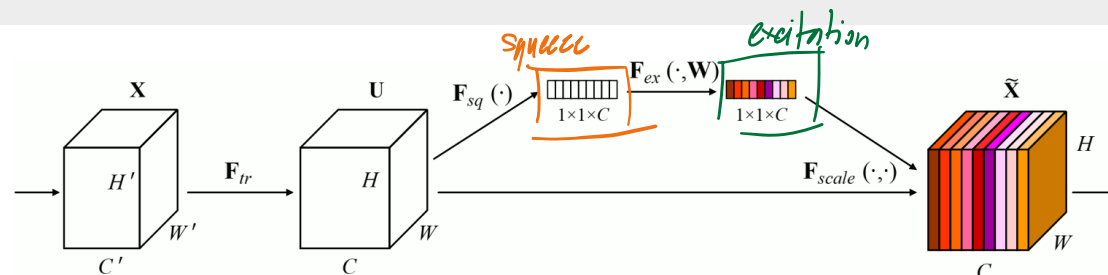


Figure 1 of "Squeeze-and-Excitation Networks", <https://arxiv.org/abs/1709.01507>

- **squeeze (global information embedding)** computes the average value of every channel;
- **excitation (adaptive recalibration)** computes a weight for every channel using a sigmoid activation function and multiplies the corresponding channel with it. To not increase the number of parameters too much (by C^2), an additional small hidden layer with $C/16$ neurons is employed (to reduce the additional parameters to $C^2/8$ only).

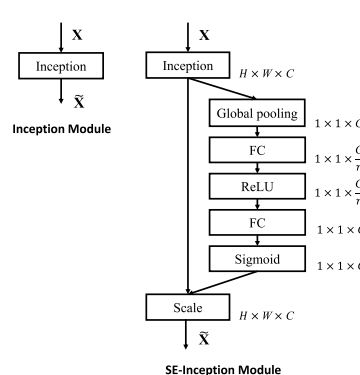


Fig. 2. The schema of the original Inception module (left) and the SE-Inception module (right).


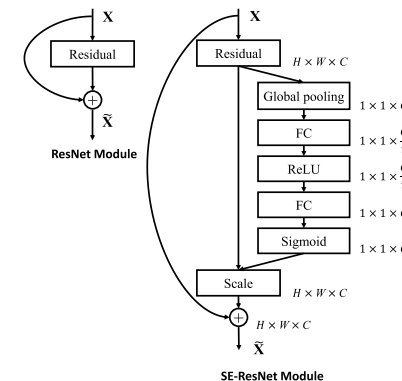


Fig. 3. The schema of the original Residual module (left) and the SE-ResNet module (right).

Figure 2 of "Squeeze-and-Excitation Networks", <https://arxiv.org/abs/1709.01507>

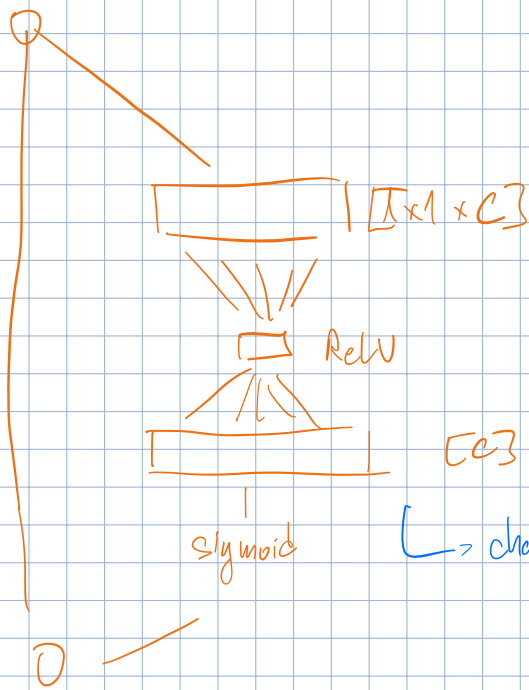

→ místo jedné fully-connected vrstvy
udělám dvě, velikosti $\frac{C}{10}$, abych
měl ve finále $\frac{C^2}{10}$ parametrů.

→ chci získat věty, jak moc máš tu konkrétní větu v obnovení

Mobile Inverted Bottleneck Convolution

When designing convolutional neural networks for mobile phones, the following **mobile inverted bottleneck** block was proposed.

- Regular convolution is replaced by **separable convolution**, which consists of

jeden kernel
konvuluje po doli

řízení kernel
konvuluje do
doli

- a **depthwise separable** convolution (for example 3×3)

acting on each channel separately (which reduces time and space complexity of a regular convolution by a factor equal to the number of channels);

tohle je nový typ konvoluce


tohle je obyč. convolution

- a **pointwise** 1×1 convolution acting on each position independently (which reduces time and space complexity of a regular convolution by a factor of $3 \cdot 3$).

→ každý kernel s konvolucí na 1×1 kernel

- The residual connections connect bottlenecks (layers with least channels).
- There is no nonlinear activation on the bottlenecks (it would lead to loss of information given small capacity of bottlenecks).

(a) Residual block

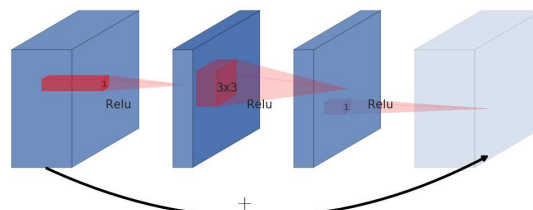

(b) Inverted residual block

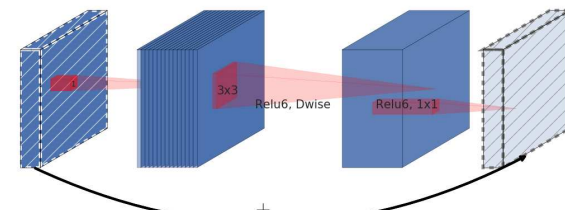


Figure 3 of "MobileNetV2: Inverted Residuals and Linear Bottlenecks", <https://arxiv.org/abs/1801.04381>

Mobile Inverted Bottleneck Convolution

The mobile inverted bottleneck convolution is denoted for example as *MBConv6 k3x3*, where the 6 denotes expansion factor after the bottleneck and 3×3 is the kernel size of the separable convolution.

Furthermore, the mobile inverted bottleneck convolution can be augmented with squeeze and excitation blocks.

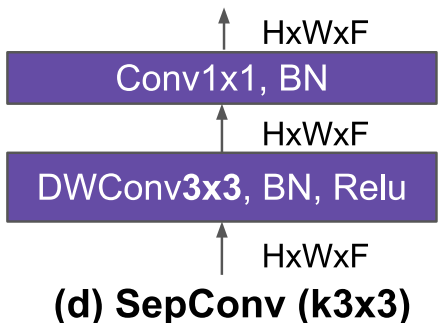


Figure 7 of "MnasNet: Platform-Aware Neural Architecture Search for Mobile", <https://arxiv.org/abs/1807.11626>

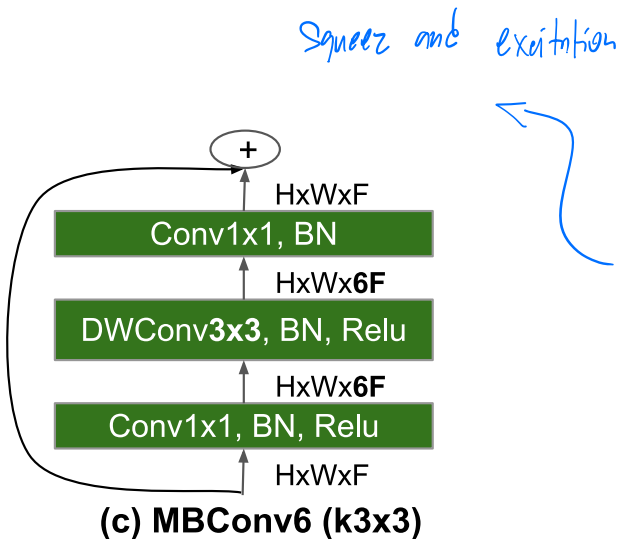


Figure 7 of "MnasNet: Platform-Aware Neural Architecture Search for Mobile", <https://arxiv.org/abs/1807.11626>

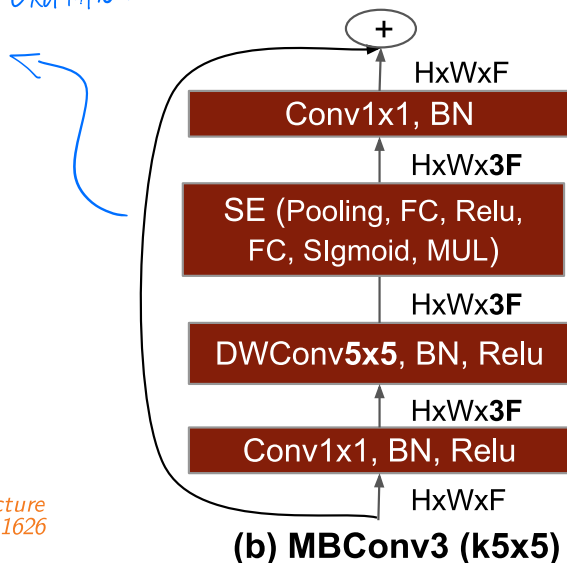


Figure 7 of "MnasNet: Platform-Aware Neural Architecture Search for Mobile", <https://arxiv.org/abs/1807.11626>

EfficientNet $\rightarrow$ veľmi dobré výsledky, ale dramaticky menší, rovná sa na tréning a inferenciu

In 2019, very performant and efficient convolutional architecture **EfficientNet** was proposed.

The EfficientNet architecture was created using a multi-objective neural architecture search that optimized both accuracy and computation complexity.


The resulting network is denoted as **EfficientNet-B0** baseline network.

It was trained using RMSProp with $\beta=0.9$ and momentum 0.9, weight decay $1e-5$, and initial learning rate 0.256 decayed by 0.97 every 2.4 epochs. Dropout with dropout rate 0.2 is used on the last layer, stochastic depth with survival probability 0.8 is employed, and $\text{swish}(\mathbf{x}) \stackrel{\text{def}}{=} \mathbf{x} \odot \sigma(\mathbf{x})$ activation function is utilized.

Stage i	Operator $\hat{\mathcal{F}}_i$	Resolution $\hat{H}_i \times \hat{W}_i$	#Channels $\hat{C}_i$	#Layers $\hat{L}_i$
1	Conv3x3	224×224	32	1
2	MBConv1, k3x3	112×112	16	1
3	MBConv6, k3x3	112×112	24	2
4	MBConv6, k5x5	56×56	40	2
5	MBConv6, k3x3	28×28	80	3
6	MBConv6, k5x5	14×14	112	3
7	MBConv6, k5x5	14×14	192	4
8	MBConv6, k3x3	7×7	320	1
9	Conv1x1 & Pooling & FC	7×7	1280	1

Table 1 of "EfficientNet: Rethinking Model Scaling for Convolutional Neural Networks", <https://arxiv.org/abs/1905.11946>

hady opachi ReLU
má in i vlnu od 0 pozitívny gradient

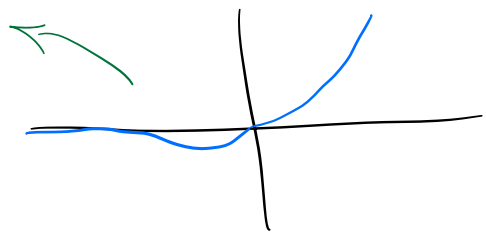

Významné parametre DRL

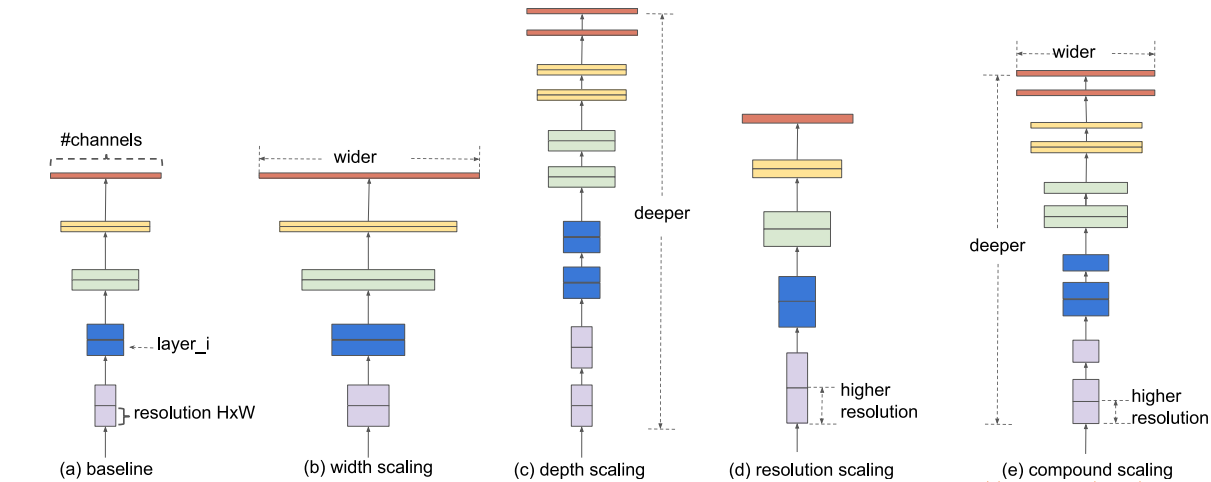


Figure 2 of "EfficientNet: Rethinking Model Scaling for Convolutional Neural Networks", <https://arxiv.org/abs/1905.11946>

To effectively scale the network, the authors propose a simultaneous increase of three qualities:

- **width**, which is the number of channels;
- **depth**, which is the number of layers;
- **resolution**, which is the input image resolution.

By a grid search on a network with double computation complexity, the best trade-off of scaling width by 1.1, depth by 1.2 and resolution by 1.15 was found ($1.1^2 \cdot 1.2 \cdot 1.15^2 \approx 2$).

Model	Top-1 Acc.	Top-5 Acc.	#Params	Ratio-to-EfficientNet	#FLOPS	Ratio-to-EfficientNet
EfficientNet-B0	77.3%	93.5%	5.3M	1x	0.39B	1x
ResNet-50 (He et al., 2016)	76.0%	93.0%	26M	4.9x	4.1B	11x
DenseNet-169 (Huang et al., 2017)	76.2%	93.2%	14M	2.6x	3.5B	8.9x
EfficientNet-B1	79.2%	94.5%	7.8M	1x	0.70B	1x
ResNet-152 (He et al., 2016)	77.8%	93.8%	60M	7.6x	11B	16x
DenseNet-264 (Huang et al., 2017)	77.9%	93.9%	34M	4.3x	6.0B	8.6x
Inception-v3 (Szegedy et al., 2016)	78.8%	94.4%	24M	3.0x	5.7B	8.1x
Xception (Chollet, 2017)	79.0%	94.5%	23M	3.0x	8.4B	12x
EfficientNet-B2	80.3%	95.0%	9.2M	1x	1.0B	1x
Inception-v4 (Szegedy et al., 2017)	80.0%	95.0%	48M	5.2x	13B	13x
Inception-resnet-v2 (Szegedy et al., 2017)	80.1%	95.1%	56M	6.1x	13B	13x
EfficientNet-B3	81.7%	95.6%	12M	1x	1.8B	1x
ResNeXt-101 (Xie et al., 2017)	80.9%	95.6%	84M	7.0x	32B	18x
PolyNet (Zhang et al., 2017)	81.3%	95.8%	92M	7.7x	35B	19x
EfficientNet-B4	83.0%	96.3%	19M	1x	4.2B	1x
SENet (Hu et al., 2018)	82.7%	96.2%	146M	7.7x	42B	10x
NASNet-A (Zoph et al., 2018)	82.7%	96.2%	89M	4.7x	24B	5.7x
AmoebaNet-A (Real et al., 2019)	82.8%	96.1%	87M	4.6x	23B	5.5x
PNASNet (Liu et al., 2018)	82.9%	96.2%	86M	4.5x	23B	6.0x
EfficientNet-B5	83.7%	96.7%	30M	1x	9.9B	1x
AmoebaNet-C (Cubuk et al., 2019)	83.5%	96.5%	155M	5.2x	41B	4.1x
EfficientNet-B6	84.2%	96.8%	43M	1x	19B	1x
EfficientNet-B7	84.4%	97.1%	66M	1x	37B	1x
GPipe (Huang et al., 2018)	84.3%	97.0%	557M	8.4x	-	-

Table 2 of "EfficientNet: Rethinking Model Scaling for Convolutional Neural Networks", <https://arxiv.org/abs/1905.11946>

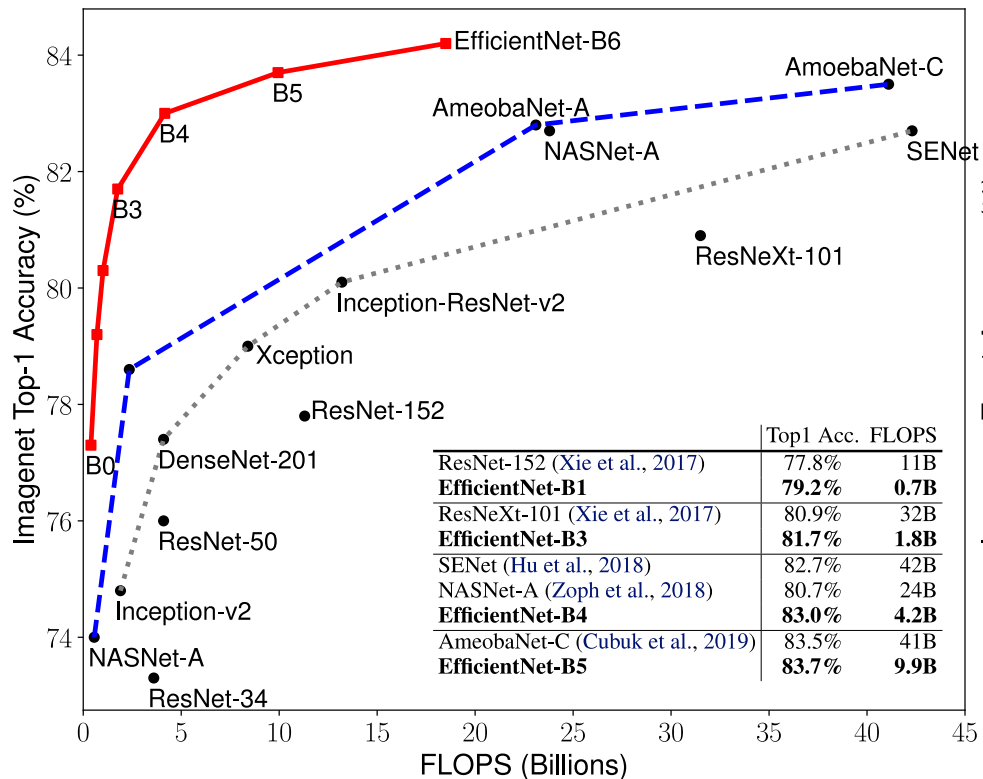


Figure 5 of "EfficientNet: Rethinking Model Scaling for Convolutional Neural Networks", <https://arxiv.org/abs/1905.11946>

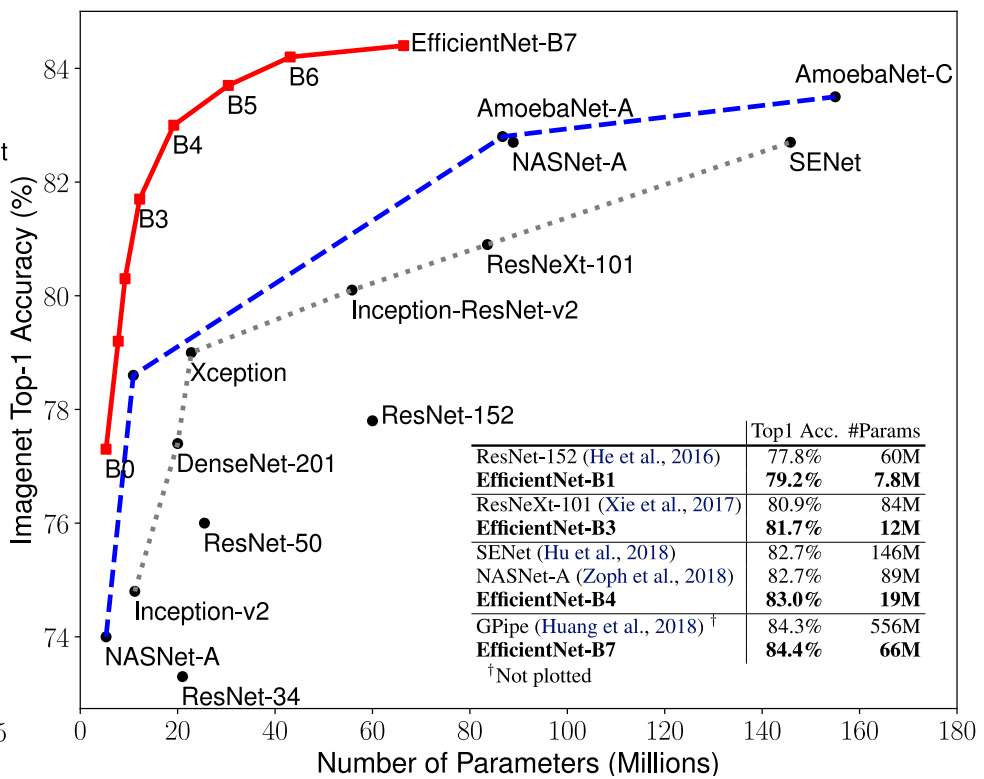


Figure 1 of "EfficientNet: Rethinking Model Scaling for Convolutional Neural Networks", <https://arxiv.org/abs/1905.11946>

In April 2021, an improved version of EfficientNet, **EfficientNetV2**, was published. It is currently one of very good CNNs available for image recognition.

The improvements between EfficientNet and EfficientNetV2 are not large:

- The separable convolutions have fewer parameters, but are slow to execute on modern hardware. The authors therefore “fuse” the 1×1 convolution and a 3×3 depthwise convolution into a regular convolution, which has more parameters and require more computation, but is in fact executed faster.
- Very large images make training very slow. EfficientNetV2 avoids aggressively scaling the image sizes, limiting maximum image size to 480.
- The authors utilize progressive training – the image size is gradually increased during training, as is the regularization strength (dropout, mixup, RandAugment magnitude).

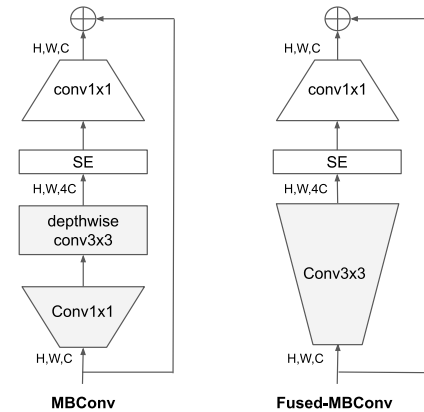


Figure 2. Structure of MBConv and Fused-MBConv.

Figure 2 of "EfficientNetV2: Smaller Models and Faster Training", <https://arxiv.org/abs/2104.00298>

EfficientNetV2 – Architecture


Table 4. EfficientNetV2-S architecture – MBConv and Fused-MBConv blocks are described in Figure 2.

Stage	Operator	Stride	#Channels	#Layers
0	Conv3x3	2	24	1
1	Fused-MBConv1, k3x3	1	24	2
2	Fused-MBConv4, k3x3	2	48	4
3	Fused-MBConv4, k3x3	2	64	4
4	MBConv4, k3x3, SE0.25	2	128	6
5	MBConv6, k3x3, SE0.25	1	160	9
6	MBConv6, k3x3, SE0.25	2	256	15
7	Conv1x1 & Pooling & FC	-	1280	1


Table 4 of "EfficientNetV2: Smaller Models and Faster Training", <https://arxiv.org/abs/2104.00298>

Stage i	Operator $\hat{\mathcal{F}}_i$	Resolution $\hat{H}_i \times \hat{W}_i$	#Channels $\hat{C}_i$	#Layers $\hat{L}_i$
1	Conv3x3	224×224	32	1
2	MBConv1, k3x3	112×112	16	1
3	MBConv6, k3x3	112×112	24	2
4	MBConv6, k5x5	56×56	40	2
5	MBConv6, k3x3	28×28	80	3
6	MBConv6, k5x5	14×14	112	3
7	MBConv6, k5x5	14×14	192	4
8	MBConv6, k3x3	7×7	320	1
9	Conv1x1 & Pooling & FC	7×7	1280	1


Table 1 of "EfficientNet: Rethinking Model Scaling for Convolutional Neural Networks", <https://arxiv.org/abs/1905.11946>

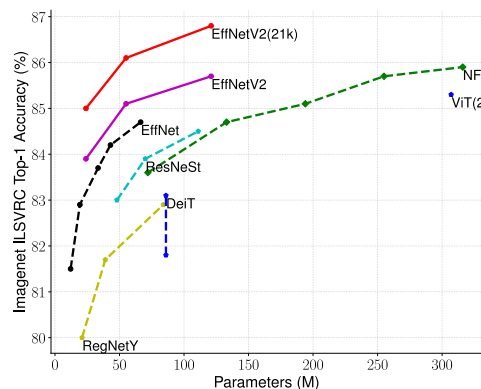

(a) Parameters

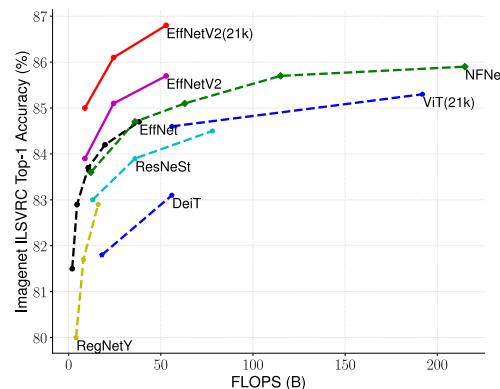

(b) FLOPs

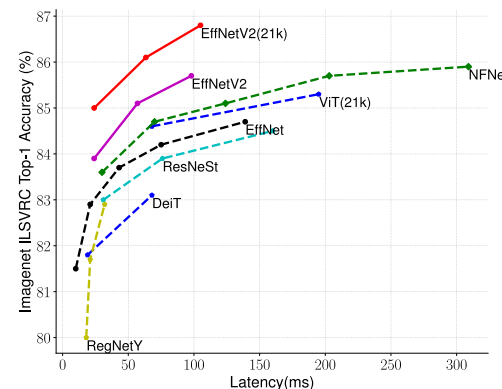

(c) GPU V100 Latency (batch 16)

Figure 5. **Model Size, FLOPs, and Inference Latency** – Latency is measured with batch size 16 on V100 GPU. 21k denotes pretrained on ImageNet21k images, others are just trained on ImageNet ILSVRC2012. Our EfficientNetV2 has slightly better parameter efficiency with EfficientNet, but runs 3x faster for inference.

Figure 5 of "EfficientNetV2: Smaller Models and Faster Training", <https://arxiv.org/abs/2104.00298>

Model		Top-1 Acc.	Params	FLOPs	Infer-time(ms)	Train-time (hours)
ConvNets & Hybrid	EfficientNet-B3 (Tan & Le, 2019a)	81.5%	12M	1.9B	19	10
	EfficientNet-B4 (Tan & Le, 2019a)	82.9%	19M	4.2B	30	21
	EfficientNet-B5 (Tan & Le, 2019a)	83.7%	30M	10B	60	43
	EfficientNet-B6 (Tan & Le, 2019a)	84.3%	43M	19B	97	75
	EfficientNet-B7 (Tan & Le, 2019a)	84.7%	66M	38B	170	139
	RegNetY-8GF (Radosavovic et al., 2020)	81.7%	39M	8B	21	-
	RegNetY-16GF (Radosavovic et al., 2020)	82.9%	84M	16B	32	-
	ResNeSt-101 (Zhang et al., 2020)	83.0%	48M	13B	31	-
	ResNeSt-200 (Zhang et al., 2020)	83.9%	70M	36B	76	-
	ResNeSt-269 (Zhang et al., 2020)	84.5%	111M	78B	160	-
	TResNet-L (Ridnik et al., 2020)	83.8%	56M	-	45	-
	TResNet-XL (Ridnik et al., 2020)	84.3%	78M	-	66	-
	EfficientNet-X (Li et al., 2021)	84.7%	73M	91B	-	-
	NFNet-F0 (Brock et al., 2021)	83.6%	72M	12B	30	8.9
	NFNet-F1 (Brock et al., 2021)	84.7%	133M	36B	70	20
	NFNet-F2 (Brock et al., 2021)	85.1%	194M	63B	124	36
	NFNet-F3 (Brock et al., 2021)	85.7%	255M	115B	203	65
	NFNet-F4 (Brock et al., 2021)	85.9%	316M	215B	309	126
	LambdaResNet-420-hybrid (Bello, 2021)	84.9%	125M	-	-	67
	BotNet-T7-hybrid (Srinivas et al., 2021)	84.7%	75M	46B	-	95
Vision Transformers	BiT-M-R152x2 (21k) (Kolesnikov et al., 2020)	85.2%	236M	135B	500	-
	ViT-B/32 (Dosovitskiy et al., 2021)	73.4%	88M	13B	13	-
	ViT-B/16 (Dosovitskiy et al., 2021)	74.9%	87M	56B	68	-
	DeiT-B (ViT+reg) (Touvron et al., 2021)	81.8%	86M	18B	19	-
	DeiT-B-384 (ViT+reg) (Touvron et al., 2021)	83.1%	86M	56B	68	-
	T2T-ViT-19 (Yuan et al., 2021)	81.4%	39M	8.4B	-	-
	T2T-ViT-24 (Yuan et al., 2021)	82.2%	64M	13B	-	-
	ViT-B/16 (21k) (Dosovitskiy et al., 2021)	84.6%	87M	56B	68	-
ConvNets (ours)	ViT-L/16 (21k) (Dosovitskiy et al., 2021)	85.3%	304M	192B	195	172
	EfficientNetV2-S	83.9%	22M	8.8B	24	7.1
	EfficientNetV2-M	85.1%	54M	24B	57	13
	EfficientNetV2-L	85.7%	120M	53B	98	24
	EfficientNetV2-S (21k)	84.9%	22M	8.8B	24	9.0
	EfficientNetV2-M (21k)	86.2%	54M	24B	57	15
	EfficientNetV2-L (21k)	86.8%	120M	53B	98	26
EfficientNetV2-XL (21k)		87.3%	208M	94B	-	45

Table 7 of "EfficientNetV2: Smaller Models and Faster Training", <https://arxiv.org/abs/2104.00298>

In many situations, we would like to utilize a model trained on a different dataset – generally, this cross-dataset usage is called **transfer learning**.

In image processing, models trained on ImageNet are frequently used as general **feature extraction models**.

The easiest scenario is to take a ImageNet model, drop the last classification layer, and use the result of the global average pooling as image features. The ImageNet model is not modified during training.

For efficiency, we may precompute the image features **once** and reuse it later many times.


Transfer Learning – Finetuning

After we have successfully trained a network employing an ImageNet model, we may improve performance further by **finetuning** – training the full network including the ImageNet model, allowing the feature extraction to adapt to the current dataset.

- The layers after the ImageNet models **should** be already trained to convergence.
- Usually a smaller learning rate is necessary, because the original model probably finished training with a very small learning rate. A good starting point is one tenth of the original starting learning rate (therefore, 0.0001 for Adam).
- We have to think about batch normalization, data augmentation, or other regularization techniques.

↑ takhle bych jinak mohl zkusit hodit do něj sly base model.

to je ten, se uvolnil trénink
a ten batch-norm tam jinak uvolňuje
vysledky nebyly sly zvyšovat, takže to adaptace trén

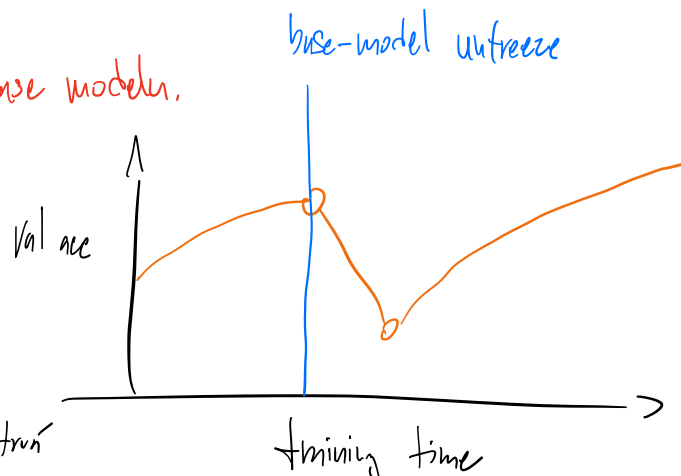

So far, the convolution operation produces either an output of the same size, or it produced a smaller one if stride was larger than one.

In order to come up with **upscaling convolution**, we start by considering how a gradient is backpropagated through a fully connected layer and a regular convolution.

In a fully connected layer without activation:

- during the forward pass, the input $\mathbf{X}$ is multiplied by the weight matrix $\mathbf{W}$ as $\mathbf{XW}$;
- during the backward pass, the gradient $\mathbf{G}$ is multiplied by the *transposed* weight matrix as $\mathbf{GW}^T$.

Analogously, in a convolutional layer without activation:

- during the forward pass, the cross-correlation operation between input I and kernel K is performed as

$$(K \star I)_{i,j,o} = \sum_{m,n,c} I_{i \cdot S + m, j \cdot S + n, c} K_{m,n,c,o};$$

→ každý jdn přes vstupní kanály

- during the backward pass, we obtain $G_{i,j,o} = \frac{\partial L}{\partial (K \star I)_{i,j,o}}$, and we need to backpropagate it to obtain $\frac{\partial L}{\partial I_{i,j,c}}$. It is not difficult to show that


$$\frac{\partial L}{\partial I_{i,j,c}} = \sum_{\substack{i',m \\ i' \cdot S + m = i}} \sum_{\substack{j',n \\ j' \cdot S + n = j}} \sum_o G_{i',j',o} K_{m,n,c,o}.$$

→ každý jdn přes vstupní kanály

This operation is called **transposed** or **upscaling** convolution and stride greater than one makes the output larger, not smaller.


Illustration of the padding schemes and different strides for a 3×3 kernel.

- **valid**, stride=1, regular:

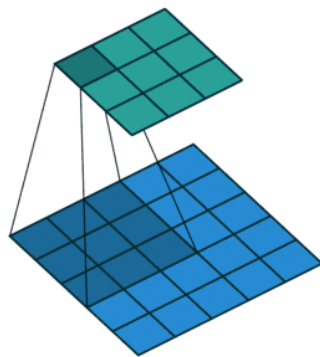


https://github.com/vdumoulin/conv_arithmetic

transposed:

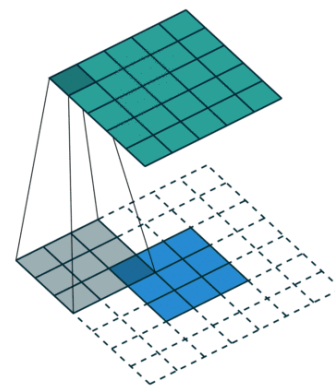


https://github.com/vdumoulin/conv_arithmetic

- **valid**, stride=2, regular:



https://github.com/vdumoulin/conv_arithmetic


transposed:

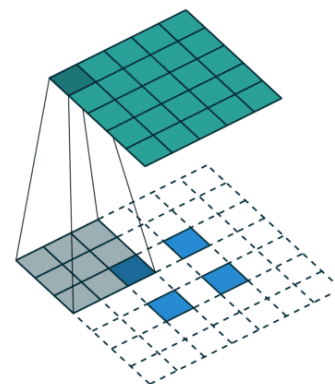

https://github.com/vdumoulin/conv_arithmetic


Illustration of the padding schemes and different strides for a 3×3 kernel.

- **same**, stride=1, regular:

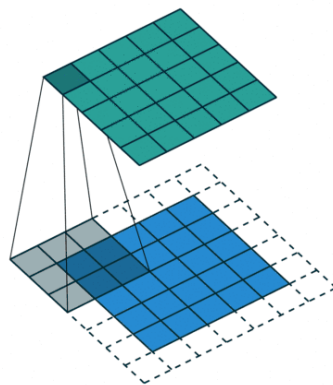


https://github.com/vdumoulin/conv_arithmetic

transposed:

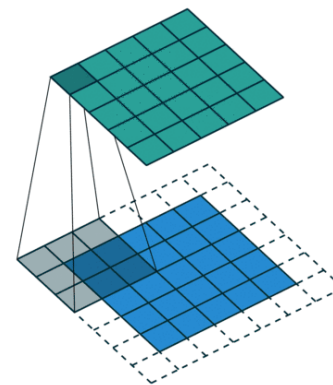


https://github.com/vdumoulin/conv_arithmetic

- **same**, stride=2, regular:




https://github.com/vdumoulin/conv_arithmetic

transposed:

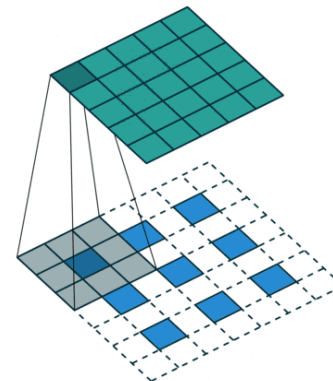

https://github.com/vdumoulin/conv_arithmetic

It is frequently used to perform upscaling of an image, as an “inverse” operation to pooling (or convolution with stride > 1), which is useful for example in *image segmentation*:

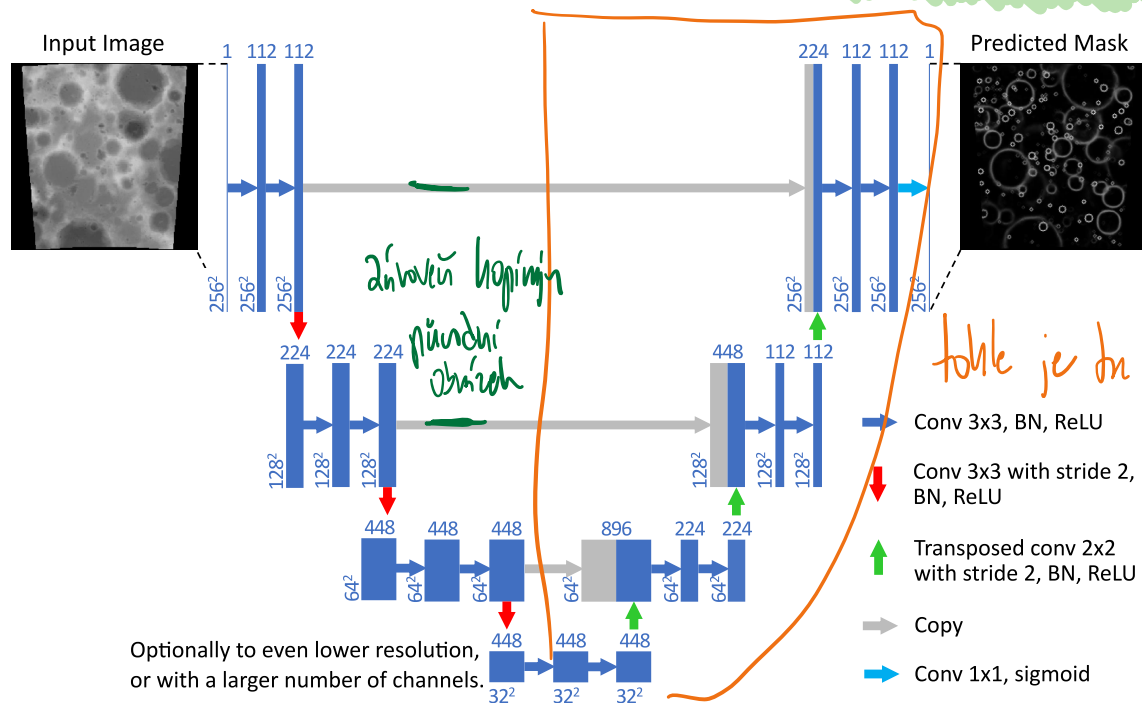

tohle je to transpozovná konvoluce

- Conv 3x3, BN, ReLU
- Conv 3x3 with stride 2, BN, ReLU
- Transposed conv 2x2 with stride 2, BN, ReLU

- globální informační hopínky
do lokálního prostředí

Modification of Figure 2 of "Lunar Crater Identification via Deep Learning", <https://arxiv.org/abs/1803.02192>